

**Mi • Light<sup>®</sup>**  
**User Instruction**

**IP Rate: IP54**  
**RGB+CCT Smart LED Downlight**  
Model No.: FUT069

# Features



RGB+CCT  
16 Millions of colors to choose



Color temperature  
2700-6500K



Dimmable  
Saturation control



2.4G RF wireless transmission  
technology



Remote control  
Control distance 30m



Smart phone App control  
Mi-Light WiFi ibox is needed



Waterproof and dustproof  
grade IP54



Made in China

# Parameters

Model No.: FUT069

Power: 15W

Input Voltage: AC86~265V / 50~60Hz

Color temperature: 2700K-6500K

Luminous Flux: 1200LM

Light Efficiency: 80LM/W

CRI:>80

PF: >0.5


Lifespan: 50000 hours

Beam Angle: 120°

IP Rate: IP54





Hole Size:  $\varnothing$ 175~180mm

Material: Aluminum

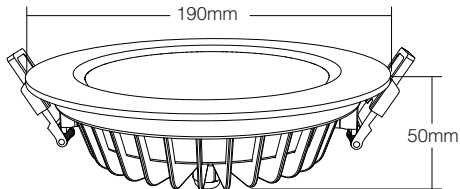

# Instructions

1. Please open the hole on the ceiling according to the correct size of Diagram 1.
2. Connect the driver properly according to the wire connection Diagram 2. And then put the driver and wire into the ceiling from the hole.
3. Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 3 and 4.




# Link / Unlink


Compatible with FUT089 / FUT092 remote controls  
(Purchased separately)

**Link:** Switch off the power, then switch on again after 5 seconds, press " | " 3 times within 3 seconds; the light will blink 3 times slowly when it is done.

**Unlink:** Switch off the power, then switch on again after 5 seconds, press corresponding " | " or master ON button 5 times within 3 seconds; the light will blink 10 times quickly when it is done.

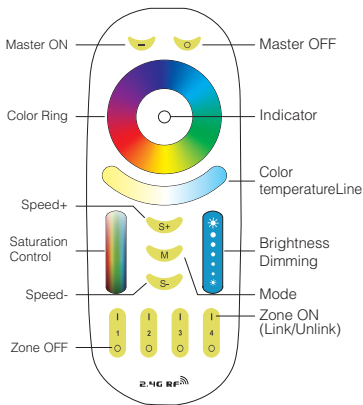

FUT092

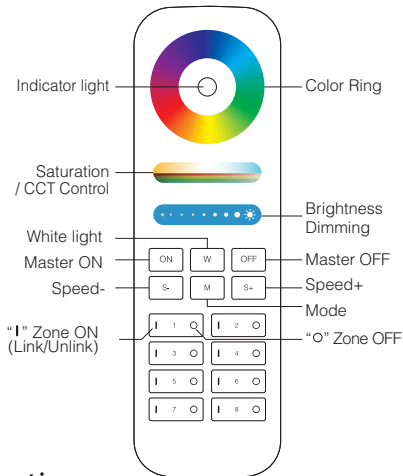

FUT089

## Caution

- Amateur do not dismantle and install the light
- Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.
- The lighting will be heating on working, pls do not cover the lighting housing.
- The waterproof and dustproof rate is IP54, just working on water drop and spray protection, pls do not put the light into water long time.  
Power supply is not waterproof, pls put it at dry area.