


ALLNET Meetingraum RGB LED Tablet 10 Zoll RK3576 Android 16 und NFC/RFID Farbe schwarz

[>>> Zum Shop-Artikel](#)



EAN CODE

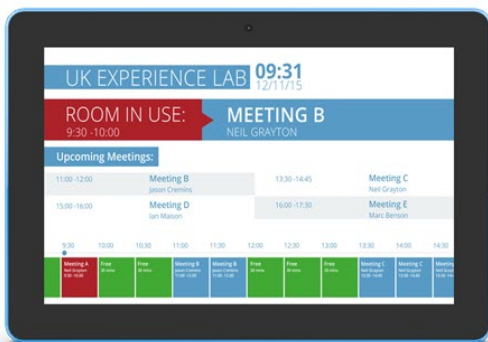

System	CPU				RK3576S Quad core cortex A53 +Quad core cortex A72									
	RAM				4GB									
	Internal memory				32GB									
	Operation system				Android 16									
	Touch screen				10-Point capacitive touch									
Display	Panel				10.1" LCD panel									

	Panel Type			IPS									
	Resolution			1280*800									
	Display Colors			16.7 M Colors									
	Viewing angle			R/L 85/85, U/D 85/85									
	Display mode			Normally black									
	Contrast ratio			1500:1									
	Response Time			25ms									
	Back-light Type			ELed									
	Luminance			280cd/m2									
	Aspect Ratio			16:10									
Network	WiFi			IEEE 802.11a/b/g/n/ac/ax									
	Bluetooth			Bluetooth 5.4									
	Ethernet			10M/100M/1000M ethernet									
Interface	SIM Slot			4G Flow Card									
	SD Slot			SD card, Max support to 64GB									
	Earphone			3.5mm									

				microphone + microphone									
	USB			USB 3.0 host									
	USB			USB for serial (TTL Level), Optional USB Host									
	RJ45			Ethernet interface									
	Type-C			Only supports ADB function									
	Power jack			DC power input									
Media play	Video format			MPEG-1, MPEG-2, MPEG-4, H.265, H.264, VP9, AV1, AVS2, MVC, AVC, etc., support up									

				to 4K									
	Audio format			MP3/ WMA /AAC/ WAV/ OGG, etc									
	Photo			JPEG /PNG /GIF, etc									
Other	Product Colors			White /Blac k									
	VESA			75*75 mm									
	Butto n			Powe r									
	G-se nsor			Supp ort 90 de grees									
	Spea ker			2*2W									
	Microphone			Singl e mic ropho ne									
	NFC			Optional,13.56MHz,ISO/IEC 18092, ISO/IEC 21481, ISO/IEC 14443 A&B, ISO/IEC 15693, Japanese Industrial Standard (JIS) (X) 6319-4, MIFARE Classic encrypted tags and cards									
	RFID			Optio nal ,1 25k,I SO/IE C 117 84/11 785,E M410 0,TK4 100/ GK41 00									
	LED light bar			LED									

				light bar with RGB and mixed color										
	Camera			Routine angle										
				5.0M P with mipi										
	4G Moduel			Optional										
	Language			Multi-language										
	Certificates			CCC/CE/FCC										
	POE			Support IEEE802.3at, up to 30W										
Working Surrounding	Working Temperature			0°C-- -40°C										
	Storage Temperature			-20°C---60°C										
	Working Humidity			20~80%RH										
	Storage Humidity			10~95%RH										
Accessories	Adapter			Adapter, 12V/1.5A										
	User manual			*1										

Merkmale

Merkmal	Wert
Abmessung:	259.36 x 278.36 x 28
Alternative Betriebssysteme:	Linux;
Arbeitsspeicher (RAM):	4
Auflösung Panel:	1280x800
Betriebssystem:	Android 16
Bluetooth:	ja
Chipset:	RK3576
Diagonale:	10
Einsatzbereiche:	Indoor
Farbe Displayrand:	schwarz
Farbe Gehäuse:	schwarz;
Hauptspeicher:	32
IP Schutzklasse Display:	IP 20
Kamera:	ja
Mobilfunk:	nein
Montageart:	integrierte Halterung;
NFC&RFID:	13,56MHz
Produktart:	Tablet
Stromversorgung:	PoE&Netzteil
Touchscreen:	kapazitiv
WLAN:	2,4&5
Gewicht:	1,418 Kg
Garantie:	24.00 Monate