



## ALLNET MSR Vibration Alarm ALL3044

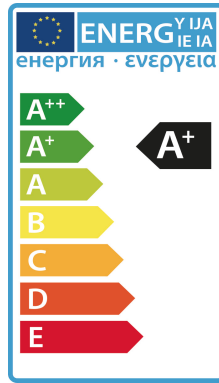

kwh/1000h:	20,00
Lumières:	2100
Watt:	20,0
Durée de vie nominale:	0 Std.
Cycles de commutation:	0
Température ambiante optimale:	0 °C

### EAN CODE

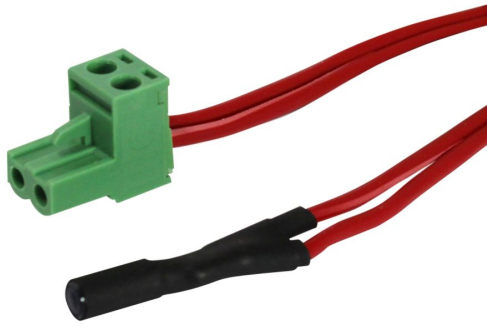

The shock sensor must be connected to the contact input with pulse stretching such as ALL3542/ALL4442.

The sensor sends a pulse as soon as a vibration is detected. In addition, this sensor is more sensitive than the ALL3043.

## Accessoires

No. d'article	Désignation
106665	ALLNET MSR IO ALL3542 HUT / 8fach Kontakteingang m. Impulsverlängerung
98836	ALLNET MSR IO ALL4442 / 4-fach Kontakteingang mit Impulsverl.
134571	ALLNET MSR Zentrale "ALL3419" inkl. 3 Sensor Ports & WLAN & Temperaturfühler "ALL3006" für IP Gebäude Automation
98686	ALLNET MSR Zentrale "ALL3500" inkl. 4 Sensor Ports & WLAN für IP Gebäude Automation
101636	ALLNET MSR Zentrale "ALL3500PoE" inkl. 4 Sensor Ports & PoE & WLAN für IP Gebäude Automation
101241	ALLNET MSR Powermeter Zentrale "ALL3692" inkl. 4 D0 & 2 S0 (opt.) & Induktion & 2 Sensor Ports für IP Gebäude Automation