


REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/29	CHECKED
---------	--------------------------------------	--------------------	---------


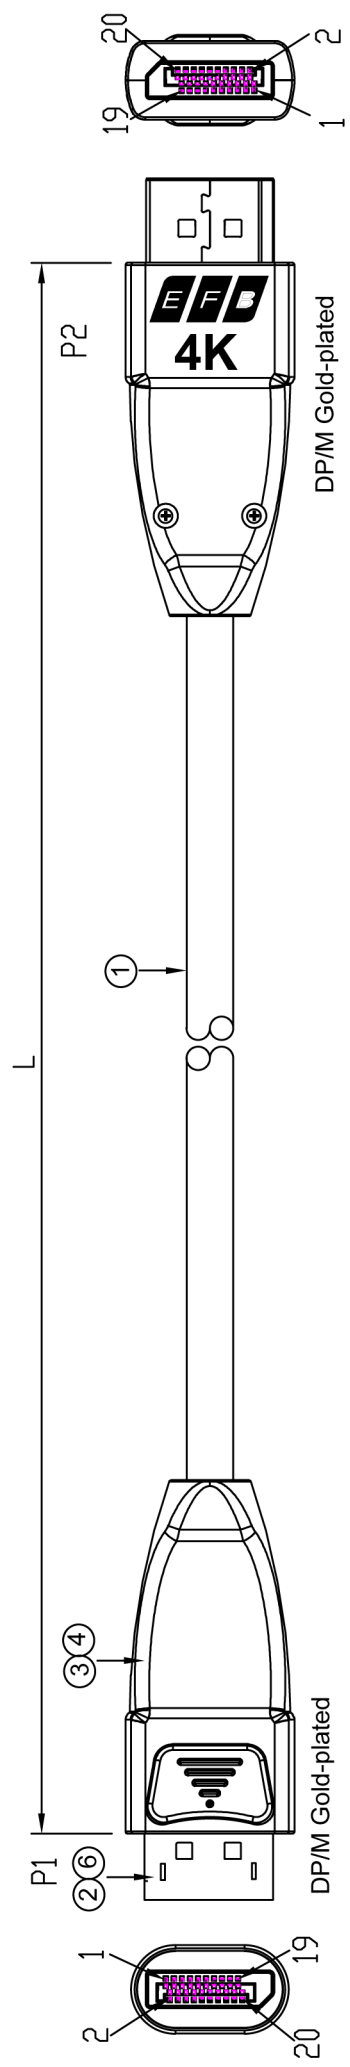


Remark:

- 100% Open/Short Test
- Conductive Resistance: 5ohms MAX
- Insulation Resistance: 10M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is RoHS compliant.
- Dp to Dp 1.2V

- A) Conductor 7/0.107TC
- B) Insulation FPE
- C) Drain wire 7/0.10TC
- D) Al foil
- E) Hot Mylar
- F) Conductor 7/0.10TC
- G) Insulation PE 0.6mm
- H) Al Foil
- I) D.w.
- J) Braiding 16/6/0.12AL
- K) Jacket OD: 7.3±0.15mm Black

Cable Spec.

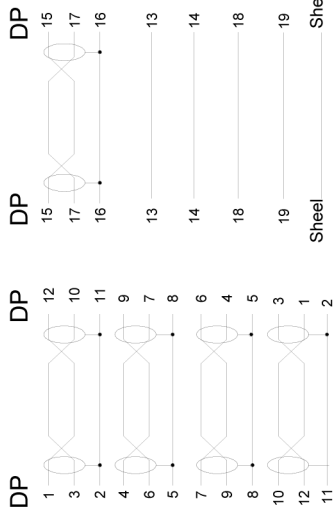

Wire method

Item NO.	Length
K5560HQSW.1	1.0m
K5560HQSW.2	2.0m
K5560HQSW.3	3.0m
K5560HQSW.5	5.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	
④	Shell	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE

TOLERANCES UNLESS OTHERWISE STATED
 X = ±0.1
 XX = ±0.2
 XXX = ±0.5

DP male, Gold-Plated
 DP 1.2V30AWG
 [(7/0.10TC+FPE)*1P+7/0.07TC+AL]*5C+
 (7/0.10TC+HDPE)*5C+AL+D+96/0.12ALB+
 PVCOD7.3mmBlack

REVISION	A0
UNIT	mm
SCALE	NO
PAGE NO	1/1
DATE	2019/11/29
CHECKED	DRAWN