




REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/29	CHECKED
---------	--------------------------------------	--------------------	---------

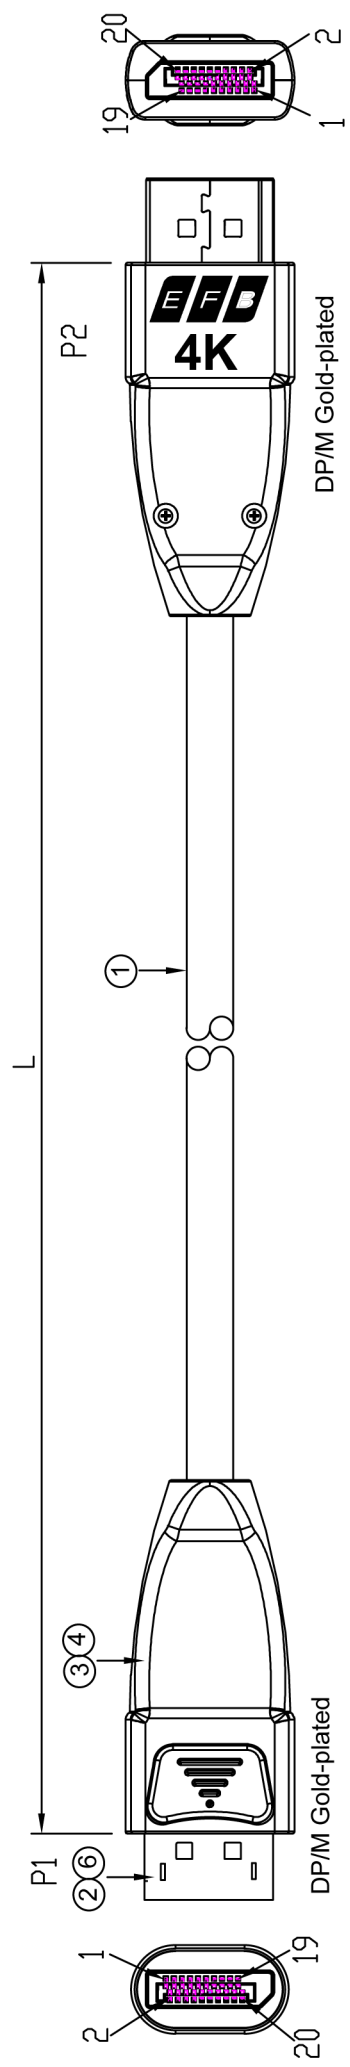

Remark:

- 100% Open/Short Test
- Conductive Resistance: 5ohms MAX
- Insulation Resistance: 10M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is RoHS compliant.
- Dp to Dp 1.2V

Item NO.	Length
K5560HQSW.1	1.0m
K5560HQSW.2	2.0m
K5560HQSW.3	3.0m
K5560HQSW.5	5.0m

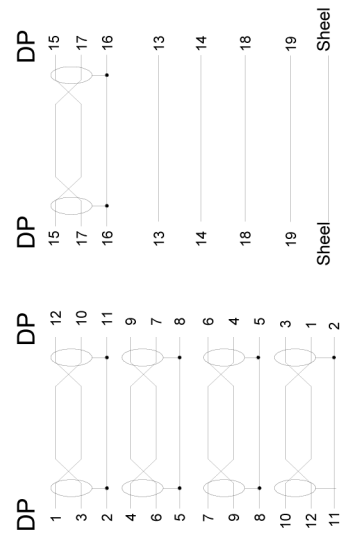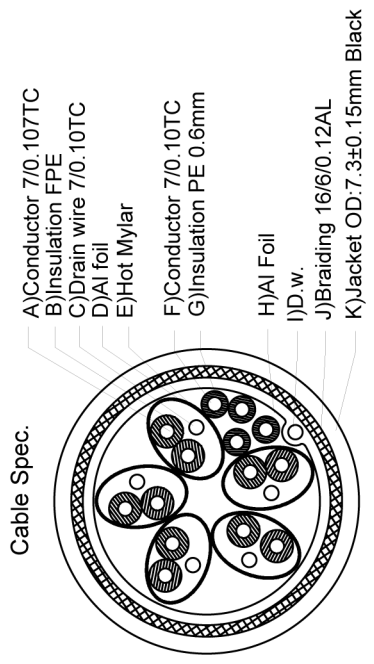

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
	DRAWN

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	
④	Shell	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		

TOLERANCES UNLESS OTHERWISE STATED
 X = ±0.1
 X = ±0.02
 XX = ±0.01