


NOTE:

- Display port 2.0/1.4 Mode
 - Supports bandwidth up to 32.4Gbps
 - Input: Source port Male TX
 - Output: Display port Male RX
 - Plug and Play
 - Connector the pin and shell gold plating
 - Metal housing with lock
 - Converts electrical data signals to optical signals
 - 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
 - Round cable Black PVC jacket OD. 4.8+/-0.2mm
 - Easy to install with Active Optic Cable
 - Resolution 8K@60Hz (4:4:4) 8bit, 4K@120Hz (4:4:4) 8bit
 - Supports 3D/HDCP2.2/DPCP1.0/EDID/HDR10/DSC1.2/Dolby MAT/DTS HD
 - ROHS 3.0 and REACH compliant
 - Operation temperature : 0°C--+50°C
 - Storage temperature : -20°C--+70°C
- 1pc/ESD Bag+brown box

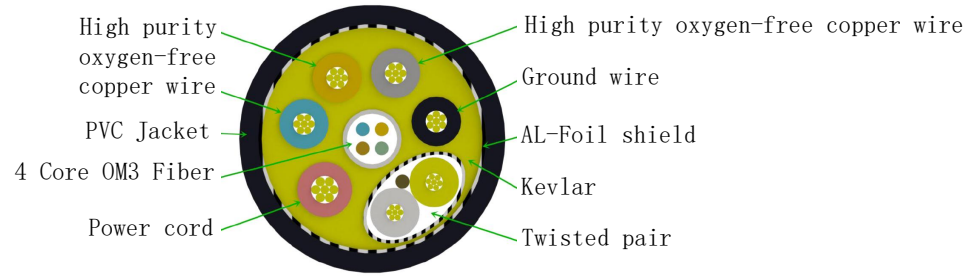

THE CAHRT

ITEM NO.	Length (mm)
S215920	7500
S215921	10000
S215922	15000
S215923	20000
S215924	25000
S215925	30000

SYNERGY21

					SYNERGY21			
CUSTOMER					ITEM NO.	SEE THE CAHRT		
PRODUCT NAME	Displayport 2.0/1.4 AOC cable				manufacture country:	CHINA	UNIT	MM
DRAWNBY	SYNERGY21	CHECKBY	SYNERGY21	APPOBY	SYNERGY21	DATE	2022-12-06	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.				
		NEW	2022-12-06	A				