



| ITEM NO.    | LENGTH(L) |
|-------------|-----------|
| K5256SW.0,5 | 500mm     |
| K5256SW.1   | 1000mm    |
| K5256SW.1,8 | 1800mm    |
| K5256SW.3   | 3000mm    |
| K5256SW.5   | 5000mm    |
| K5256SW.2   | 2000mm    |
| K5256SW.1,5 | 1500mm    |

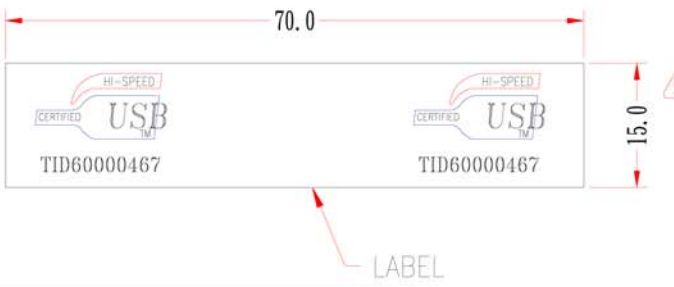

MARKING:  
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+20AWG/2C (UL) TYPE CM 75°C  
 Operating temperature: between -20°C and +80°C  
 Storage temperature: between -40°C and +85°C

- \* NOTE: All relevant materials are complied with RoHS directive .
- ⚠ This cable is silicone free.
- ⚠ 100% SHORT AND PPEN TEST

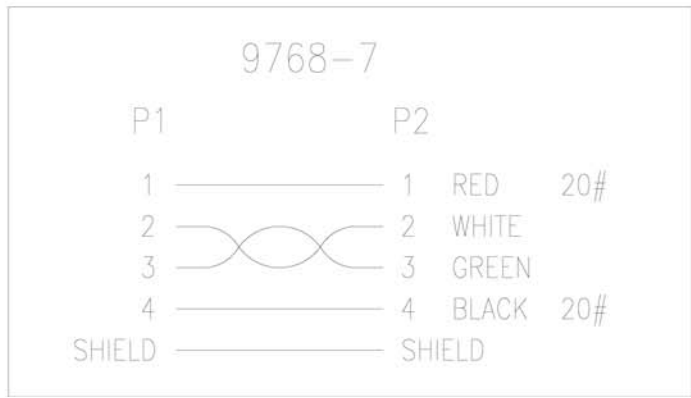

|     |  |                |             |
|-----|--|----------------|-------------|
| 5   | MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)   | H1BF10-0304K09 | M304        |
| 4   | MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)   | H1BF10-0304K09 | M304        |
| 3   | USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 20AWG, BRAID 80%, OD 5.0mm, JACKET BLACK, (-40°C~+85°C,COLD-RESISTANT)<br>DRAWING No. EUAB2801P2002C-096 | H5KH22-0304K09 | L-20mm M304 |
| 2   | USB B MALE 2.0, GOLD PLATING 30μ* ON CONTACTS, WHITE INSULATOR, THREE PIECS SOLDER TYPE  | A1HB14-0108    | 1set M108   |
| 1   | USB A MALE 2.0, GOLD PLATING 30μ* ON CONTACTS, WHITE INSULATOR,THREE PIECS SOLDER TYPE   | A1HA12-0108    | 1set M108   |
| No. | DESCRIPTION  | Q'TY           | Supplier    |