


NOTE:

1. The primary coating and secondary coating have the same color
2. Loose buffered, easy strip type at least 1m
3. ROHS 2.0 and REACH compliant

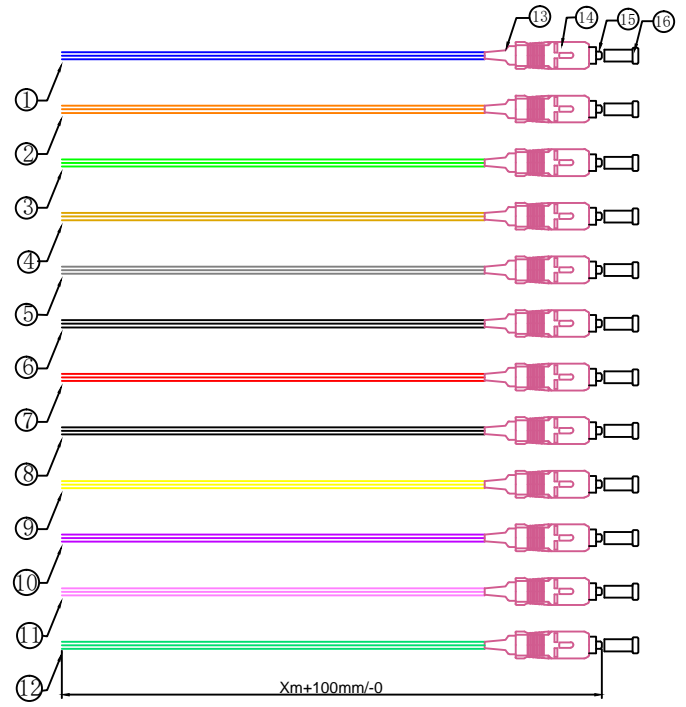

⑫	SC Transparent Dust Cap	12	
⑮	SC/ UPC MM Ferrule	12	
⑭	SC MM 0.9 Erika Violet Connector	12	
⑬	SC 0.9 Erika Violet Boot	12	
⑫	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm TURQUOISE LSZH	X _m	
⑪	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm PINK LSZH	X _m	
⑩	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm VIOLET LSZH	X _m	
⑨	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm YELLOW LSZH	X _m	
⑧	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm BLACK LSZH	X _m	
⑦	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm RED LSZH	X _m	
⑥	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm WHITE LSZH	X _m	
⑤	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm GREY LSZH	X _m	
④	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm BROWN LSZH	X _m	
③	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm GREEN LSZH	X _m	
②	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm ORANGE LSZH	X _m	
①	Fiber Cable LOOSE TUBE MM OM4 50/125 0.9mm BLUE LSZH	X _m	
NO	SPECIFICATION STANDARD	QT' Y	REMARK

Grade Designation: Each to Reference

Type	Multi-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	≥30dB (IEC 61300-3-6)
Test Wavelength	850nm

SYNERGY 21							
CUSTOMER				ITEM NO.		S215524	
PRODUCT NAME		Pigtailset SC/UPC OM4 50/125 12 different colors 0.9		manufacture country		CHINA	UNIT MM
DRAWNBY		CHECKBY		APPOBY		DATE	
SYNERGY 21		SYNERGY 21		SYNERGY 21		2020-8-24	

		NEW		2020-8-24	A
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.


TEST REPORT for example:

SYNERGY 21®														
TEST Protokoll														
Typ: SYNERGY	ITEM No.			Artikel NO.										
Produkt Beschreibung:														
Stueckzahl :1 Stk														
Einfuegedaempfung nach DIN 18600 Verfahren 7														
Wellenlaenge 850nm														
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise
Steckerdaempfung	0,3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (dB)														
Ergebnis	OK													
Datum:														
Achtung LWL Komponenten														
- Vorsichtig handhaben														
- Mindestbiegeradius von 40mm nicht unterschreiten														
- Stecken u. loesen der Verbindung nur durch														
Handhabung am Steckergehause														
Nicht am Kabel ziehen!!!														
- Reklamationen in diesem Bereich koennen wir nicht anerkennen.														
- Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern.														

PACKING: PE BAG + LABEL + TEST REPORT

Chart:

NO.	ITEM NO.	LENGTH.
1		0.5M
2		1.0M
3	S215524	2.0M

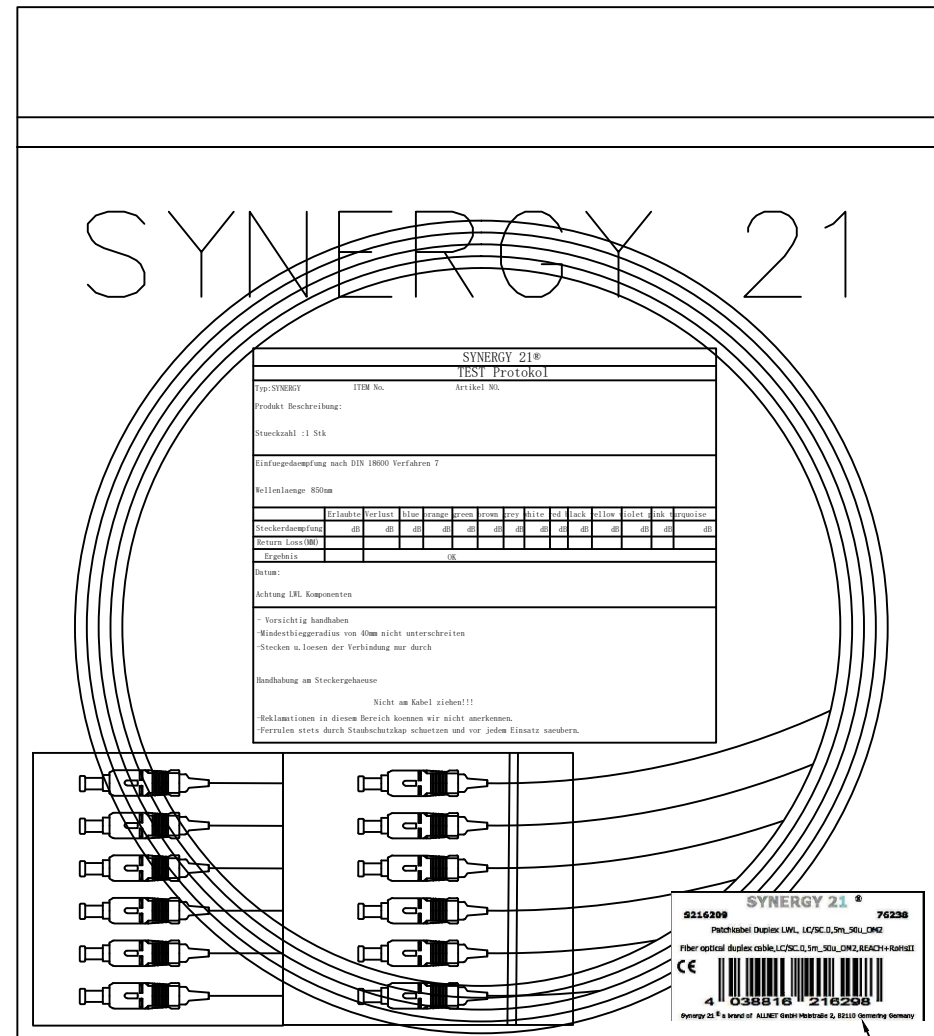

SYNERGY 21											
CUSTOMER				ITEM NO.		S215524					
PRODUCT NAME				12 different colors 0.9		manufacture country		CHINA	UNIT	MM	
NEW			2020-8-24		A		DRAWNBY		CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2020-8-24	