

BPSE24V40A/BPSE48V40A
BPSE72V40A

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Tower Form Factor
- Sealed Lead-acid Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

1. Input Connector
2. Battery Output Connector
3. On-board Replaceable Fuse Cover

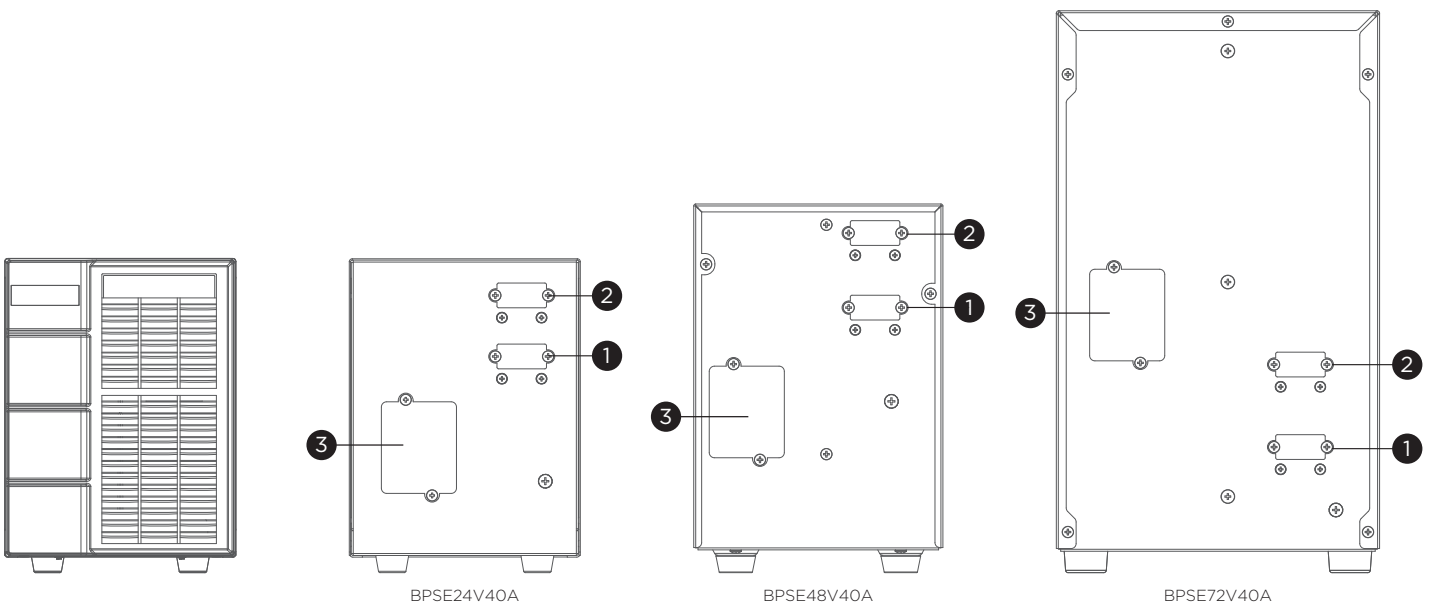



TECHNICAL SPECIFICATIONS

Model Name	BPSE24V40A	BPSE48V40A	BPSE72V40A
General			
Nominal Output Voltage (Vdc)	24	48	72
Rated Output Current (A)	40		
Battery			
Battery Type	Sealed Lead-acid		
Built-in Charger	No		
Typical Recharge Time (Hours)	2(Depends on Connected UPS)		
User-replaceable	No		
Expansion Ready	Yes		
Compatible UPS Models	OLS1000EA	OLS2000EA	OLS3000EA
Physical			
Form Factor	Tower		
Physical Size			
Dimensions (WxHxD) (mm.)	140 x 191 x 327	151 x 225 x 394	196 x 337 x 416
Weight (kg.)	13	24.5	38
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Certifications			
Certifications*	CE		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

