PAGE	1/1

REVISIONS			
REV	DATE	DESCRIPTION	APPRO. BY

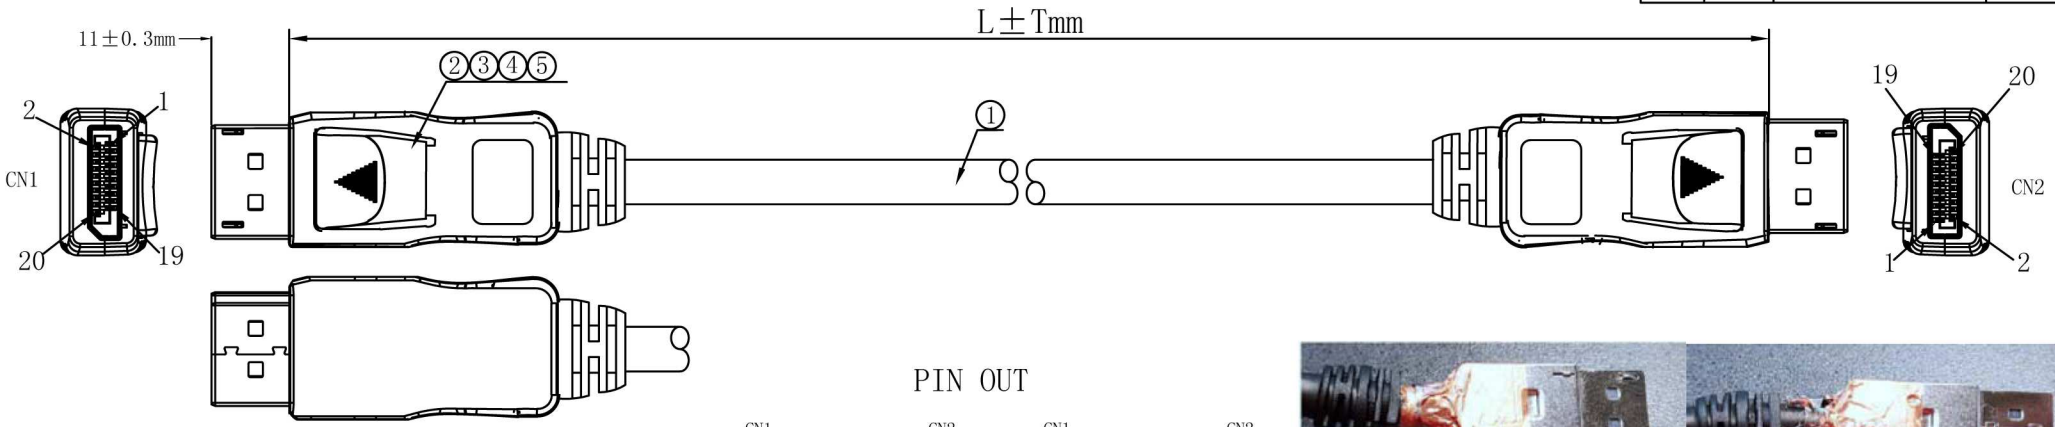

PIN OUT

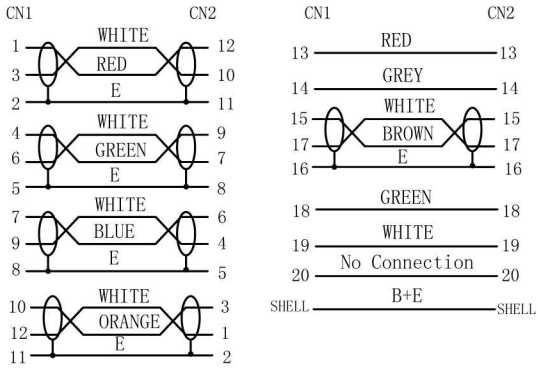

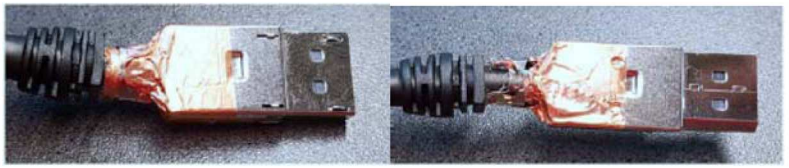

NOTE:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance: DC 200V 10MΩ MIN;
   (3). Contactor resistance: 5Ω MAX;
2. RoHS & Reach Compliant.
3. PRINT WORD: DisplayPort Cable AWM STYLE 20276 80℃ 30V VW-1
4. Display Port 1.4 Version

Item No.	Length
K5567SW.0.5	500±15mm
K5567SW.1	1000±20mm
K5567SW.1.5	1500±20mm
K5567SW.1.8	1800±25mm
K5567SW.2	2000±30mm

MATERIAL LIST:

NO.	PARTS.NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑤	PLASTIC HOOD	COLOR/BLACK	2	
④	OUTER MOLD	PVC 88A COLOR:BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	DisplayPort 20P/Male,The pin Gold plated,The shell Nickel plated	2	
①	CABLE	DP 1.4V 30AWG(1/0.254BC*2C+E+AL+HM)*5+1/0.254BC*4C+AEB E=1/0.254BC B=0.12mm/9*16 AL-MG JACKER:PVC/BLACK OD:6.0±0.2mm	1	

CUSTOMER'S ITEM		CUSTOMER		
DRAWING		TITLE	Display Port DP/M-DP/M	
UNIT	mm	SCALE	REV	A/0
DRAWN BY	CHECK BY	APPRO BY	DATE	
Zhouqinghua			2019/12/20	