



Número de artículo: 211733
Número de fabricante: ALL-AC100

ALLNET Apollo On-Prem Hardware Controller / Management & Provisioning of AP's and Switches Apollo Series "ALL-AC100"

>>> Al artículo de la tienda



EAN CODE



On-Premises Management Network Controller

For small businesses who need to manage access points and switches quickly and easily, requires no complicated installation—simply plug and play. The intuitive interface allows you to register, configure, and add devices to your network in just a few clicks.

Highlights:


- Managed Access Point & Switch
- Single Interface to Control All Devices
- Organize your Network by Location or Floors
- Devices are Plug & Deploy, No Hassle Set Up
- Dashboard to See Network Status at a Glance
- Notifications / Alerts When Issues Happen
- Diagnostic Tools to Identify and Resolve Issues
- Device Configuration as Group or Individually
- Wi-Fi Client List, Traffic and Application Statistics
- Easily setup Captive Portals and Guest Networks
- Scheduled Auto-Firmware Update of Devices
- Topology Map of Installed Devices



Physical Interfaces:



Mouting Holes

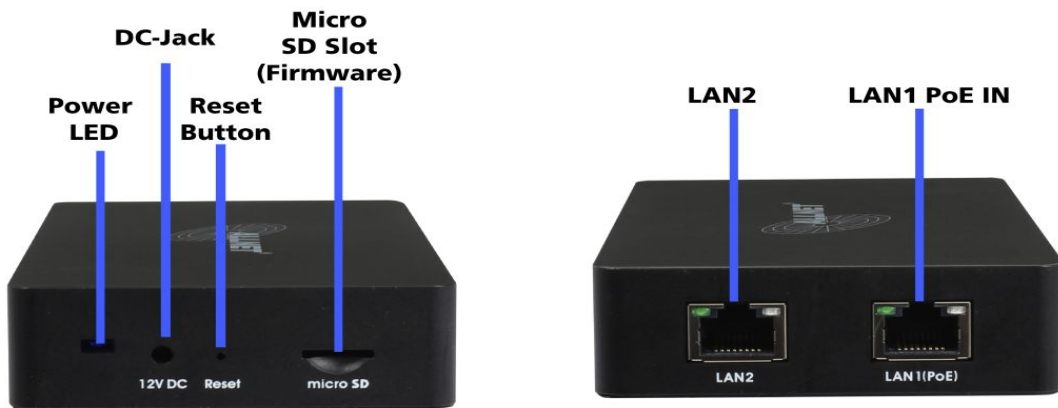

Software Features

ALL-AC100 Controller

Dashboard
Manage Access Point / Switch
Status



Channel Utilization Online AP Online Switch AP Usage Switch Usage 2.4Ghz or 5Ghz Client Ration Number of Online Switch Number of Offline Switch Number of Online AP Number of Offline Switch Number of client device in 2.4 GHz radio Number of client device in 5 GHz radio
Throughput Client Traffic: Total, Download, Upload
Traffic Top Access Point Top Clients Top SSIDs Top Applications
Topology Show Label Redundant
Clients
Throughput Client Name Traffic : Total, Download, Upload Filter : Favorite, Time, SSID, OS, Client, Last Associate AP, IP Display, Client Name, MAC, Access, Last Seen, Last Asso. AP, SSID, IP, OS, Vendor, RSSI, Rate, Band Access Control Export
Configure SSID
Display SSID Radio Enabled Hidden Security Captive Portal Splash Page Bandwidth Limit Scheduling Application Analysis



Add SSID

Wireless

Name
Enabled
Hide
Radio
Security Type: WPA2-PSK/WPA3-PSK/WPA2-Enterprise/WPA3-Enterprise
802.11r
802.11w: All clients/Allow 11w-clients only
Client IP Mode: NAT Mode/Bridge Mode
Default VLAN
Dynamic Client VLAN Pooling
Enable Application Analysis

Advanced Setting

L2 Isolation
Band Steering: Type, RSSI Threshold, Client Percent
BCMC Suppression
Bandwidth Limit
Per Client: Download/Upload
Per SSID: Download/Upload
Recommendation: Application, Bandwidth
Captive Portal
Authentication Type: Click-through, EnGenius Authentication, Custom Radius, Voucher Service
Redirect URL:

- Redirect to the URL that the user was trying to visit
- Redirect users to a specified URL after login

Advanced Setting: Session Timeout/Idle Timeout/Walled Garden/HTTPS Login
Splash Page
Splash Page Type: External Splash Page URL/Local Splash Page
Schedule
Scheduling
Quick Template
Access Control
Block List
VIP List

Radio Setting

Indoor & Outdoor

Radio
Channel
Channel Width
Target Tx Power
Min. Bitrate
Client Limit
Discard 802.11a/b/g
Disable 11as
Background Scanning
Client Balancing
Mesh



Controller User
Radius Users Display Name Email Authorized SSID Create Date Status Add User Email Name Password SSID Authorization
Authorized SSIDs Display Name Email Authorized by Authorized Date De-authorize
Firmware Upgrade
AP Firmware Lists: Model, Firmware Version, Upload Date, Actions Maintenance Window Upload Upgrade Now
Switch Firmware Lists: Model, Firmware Version, Upload Date, Actions Maintenance Window Upload Upgrade Now
Alert Setting
AP Basic: AP go offline for event with severity Professional: Configuration changed within network
Switch Basic: AP go offline for event with severity Professional: <ul style="list-style-type: none">• Configuration changed within network• Switch Port link status change• Switch STP port status change• Switch LBD status change



VLAN Settings
Display VLAN ID Name Voice VLAN: Protocol, Bridge Priority LLDP
Voice VLAN Voice VLAN ID QoS Priority Mode OUIs: OUI Address, Description Quality of Service Trust Mode Scheduling Method Queue Mapping: CoS, DSCP IGMP Snooping: Version, VLANs Jumbo Frames: MTU Size

General Settings
Network Country, Time Zone Local Credential: Username, Password SNMP: SNMP State, Community
AP LED Light Syslog Server: Status, Log Server Address, Log Server Port Message for Blocked Client
Advanced Settings Presence Reporting: Server Location, Key, Interval Traffic Log Multicast to Unicast
Switch LED Light Syslog Server: Status, Log Server Address, Log Server Port
Access Control
Blocked List VIP List Analyze
Event Logs
Device Event Time Device Event Type Description / Detail



Número de artículo: 211733
Número de fabricante: ALL-AC100

System Event

Time
Device
Event Type
Description / Detail

Config Log

Time
Device
Event Type
Description / Detail

Team Members**Display**

Name
Email
System Permissions
Network Managed
Status
Last Login
Action

Invite New Member

User Email
Networks
Permission

Organization**Inventory****Devices**

Network
Model
Serial Number
MAC Address
Registered Time
Registered By

Register Device

Pending Approval: Serial Number, Model, MAC
Manually: Serial Number

System Information**Usage**

CPU
Memory
Disk
System Up Time



Software Version
Check for Update

Email Alerts

Mail Server

SMTP Server
SMTP Port
Authentication
User Name
Password
From Email Address
To Email Address
Subject

Backup & Restore

Configuration Backup

Name
Network
Time
Creator
Action

System Backup

Backup System Configuration
Restore System Configuration

Account Profile

Edit Profile
Password
Reset
Reboot
Two-Factor
Authentication
Notification Settings
Logout

Access Point

Display

Name
MAC address
Model Name
WAP IP
LAN IP
Client (2.4G/5G)



Número de artículo: 211733
Número de fabricante: ALL-AC100

FW Version
Network
Uptime
Last Update
Mesh Mode
Action: Detail/Reboot
Throughput
Channel Utilization
Radio: 2.4GHz/5GHz, Unlock. Enabled, Channel, Target TX Power, Channel Width
WLAN: SSID, Status
Mesh: Don't allow this AP to join the Mesh network
Location

Details

Device Information

Model Name
Firmware
Serial Number
MAC Address
Configuration
IP Address
Subnet Mask
Gateway
Topology
LED Light
LED Blinking
2.4 GHz Channel & TX Power
5 GHz Channel & TX Power

Summary SSID Information

Unlock
SSID
Enabled
Hidden
Radio
Security
Captive Portal
Clients in 5 mins (2.4GHz/5GHz)

Throughput

Client
Traffic: Total, Download, Upload

Radio

2.4GHz and 5GHz
Unlock
Enabled
Channel



Número de artículo: 211733
Número de fabricante: ALL-AC100

Target Tx Power Min. Bitrate Client Limit Channel Width Discard 11a/b/g Mesh:Don't allow this AP to join the Mesh network
IP Addressing
Static DHCP IPv4 Address Subnet Mask Gateway DNS Server 1 DNS Server 2 Management VLAN
Logs
ADD Filter
Time Event Type Description
Clients
Filter
Favorite Time SSID OS Client IP
List
Client Name MAC Access Last Seen SSID IP OS Vendor RSSI Rate Band Download
Access Control
VIP Block Normal



Número de artículo: 211733
Número de fabricante: ALL-AC100

Export

CSV file

Switch

Display

Name MAC address Model Name WAP IP LAN IP Ports (Active/Total) FW Version Network Uptime Last Update Action: Detail/Reboot Port View: Speed, Disconnected, Disabled, PoE, Uplink, Blocked VLAN: Name, Tagged, Untagged Status: PoE, STP, IGMP Snooping, LLDP, QoS, Voice VLAN
--

Detail

Device Information

Model Name Firmware Serial Number MAC Address Configuration IP Address Subnet Mask Gateway Topology LED Light LED Blinking Voice VLAN Jumbo Frame IGMP Snooping STP LLDP QoS
--

Summary Ports

Speed Dsconnect Disabled



PoE Uplink Blocked
System Config.
Spanning Tree LLDP Voice VLAN QoS IGMP Snooping Jumbo Frame Local GUI Debug Log Upload

Ports
Port Label Enabled Voice VLAN Speed/Duplex PoE PVID Untagged VLAN Tagged VLAN Isolation Rate Limit (Tx/Rx) QoS
Configure
Enable Label Speed/Duplex VLAN: • PVID • Enabled Voice VLAN<br Isolation Rate Limit
VLAN
VLAN ID Name Tagged Untagged
Mirror
Session ID Session State Destination Port Egress



Número de artículo: 211733
Número de fabricante: ALL-AC100

Ingress
PoE Schedule
PoE Scheduling per port
Link Aggregation
Trunk: ID Aggregation Type Active Port Member Ports

Technical Details:

	ALL-AC100
Main Chipset	Qualcomm ARM A53, 1GHz Dual-Core
Description	On-Premises Network Controller
SPI/NAND Flash Memory	eMMC 8GB
RAM	1GB DDR4
Interface	2x 1GbE LAN LAN1 PoE IN
Dimensions (W x D x H)	153x77x25mm
Operating Temperature	0°C to 40°C
Certificaton (Generic)	FCC CE

Accesorios

Número de artículo	Denominación
211734	ALLNET Apollo Wireless AP WIFI6 • AX3000 • 2x2 • Indoor • 2.5 GbE • ALL-WAPC0522AX-3000 • Apollo
211736	ALLNET Apollo Wireless AP WIFI6 • AX5400 • 2x2:2; 4x4:4 • Indoor • 2.5 GbE • ALL-WAPC0544AX-5400 • Apollo
211739	ALLNET Apollo Wireless AP WIFI6 • AX3000 • 2x2 • Outdoor IP67 • 2.5 GbE • ALL-WAPC0522AXO-3000 • Apollo
186548	ALLNET ALL0488v6 Inyector PoE Gigabit PoE & PoE+ (15.4W/30W)



Número de artículo: 211733
Número de fabricante: ALL-AC100

Número de artículo	Denominación
209904	ALLNET SG8310v2PM Switch smart managed 10x Capa 2
193997	ALLNET ALL-SG8610PM Switch gestionable 8x Gigabit 130W / 2x SFP / 8x PoE+