



REVISIONS		
REV	DATE	DESCRIPTION
		APPRO. BY

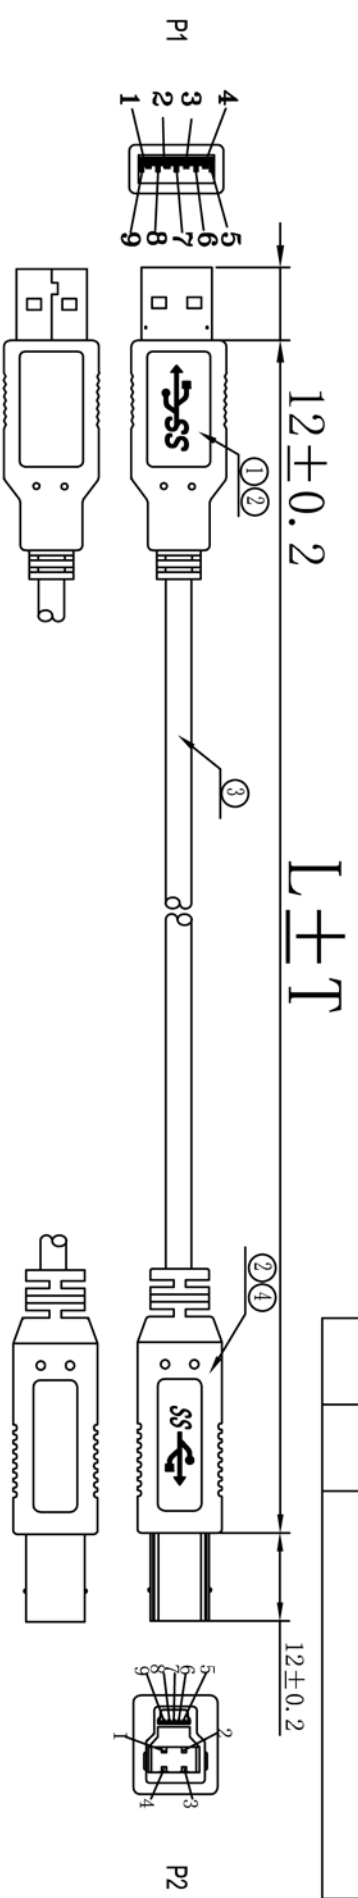

PIN OUT

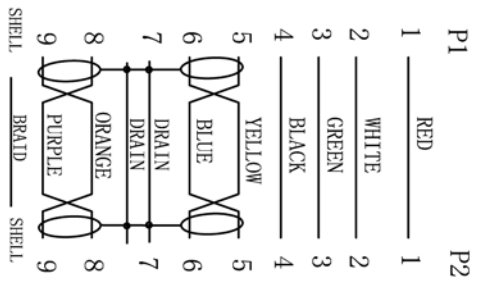

NOTE 1:

ITEM NO.	LENGTH
K5236.1, 8	1800 ± 18mm
K5236.3	3000 ± 30mm
K5236.5	5000 ± 50mm

NOTE:

1. PRINTING: AWM 80°C 30V VW-1 USB3.0 Super Speed Cable
2. RoHS compliant.
3. Operating Temperature: -15°C-80°C

4	CONNECTOR	USB3.0 B/M TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE Insulator	1 Set
3	CABLE	USB 3.0 28AWG (7/0.127TC*1P+E+W/M)*2+7/0.127TC*1P+7/0.127TC*2C+AB B-AL-MG-F-7/0.127TC Jacket:PVC/BLACK OD: 5.3 ± 0.2mm	1
2	OVERMOLD	PVC COLOR:BLACK	20g
1	CONNECTOR	USB 3.0 A/M TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE Insulator	1 Set
NO.	MAT. NAME	DESCRIPTION	Q' TY

CUSTOMER'S ITEM	K5236.X	CUSTOMER	
DRAWING		TITLE	USB CABLE
UNIT	mm	SCALE	1:1
DRAWN BY	LIUJINGJING	CHECK BY	
		APPRO BY	
		DATE	2011.10.31

