


NOTE:

1. Electrical test:
 - (1). 100% open short & miss wire test;
 - (2). Insulation resistance: DC 300V 10M ohm;
 - (3). Contactor resistance: 3 ohm;
 - (4). Dielectric strength: 150V AC/Sec, 1mA.
 - (5). Displayport practical application Test Pass
2. PACKING: 1PCS/SYNERGY 21 PE BAG+LABEL
3. ROHS COMPLIANT
4. PRINT WORD: DisplayPort Cable E119932-T 兄 AWM STYLE 20276 80°C 30V VW-1 Copartner

①	PE BAG	SYNERGY 21 SLIP PE BAG	1	
⑩	LABEL	NO DRY GLUE LABEL	1	
⑨	MINI TIE	WHITE	2	
⑧	DUST CAP	MINI DP 20PIN MALE LDPE	1	
⑦	MOLDED	45P WHITE PVC	2	
⑥	INTER MOLD	LDPE	2	
⑤	TUBE	Ø0.8*10 HEAT SHRINK TUBE	7	
④	TUBE	Ø2.0*5 HEAT SHRINK TUBE	10	
③	CONNECTOR	MINI DP 20P/M SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED		
②	CONNECTOR	MINI DP 20P/F SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED	1	
①	CABEL	32AWG(7/0.08TC*1P+7/0.08TC+FAM)*5PCS+7/0.08TC*5C+AL-FIOL+7/0.08TC+BRAID 16/5/0.12 AL-MG WHITE PVC OD5.5MM±0.2	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

PIN OUT

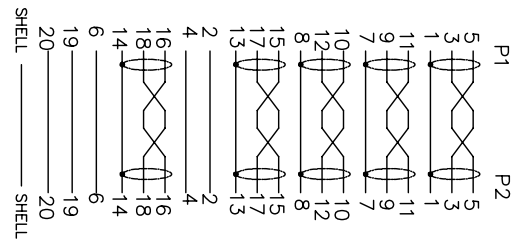


SYNERGY 21

CUSTOMER	SYNERGY 21
PRODUCT NAME	MINI DP/M to MINI DP/F
DRAWNBY	CHECKBY
SYNERGY 21	SYNERGY 21
ITEM NO.	S216366
MANUFACTURE COUNTRY:	CHINA
APPOBY	DATE
SYNERGY 21	2012.08.14

Chart :

COLOR: WHITE		
ITEM	LENGTH	PACKING
S216366	3000±50MM	SYNERGY 21 Bag B

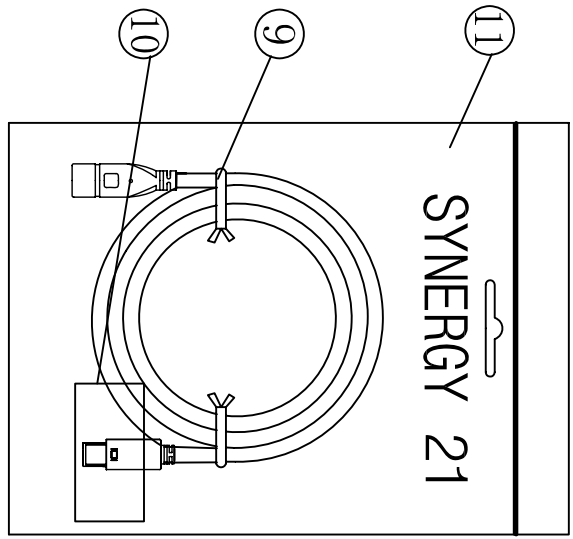

SYNERGY 21

CUSTOMER		PRODUCT NAME		MIN DP/M to MINI DP/F		ITEM NO.		S216366	
DRAWNBY		CHECKBY		SYNERGY 21		MANUFACTURE COUNTRY:		CHINA	
DATE		REV.		2012. 08. 14		APPROBY		DATE	
BY		CHK		REVISION RECORD MODIFICATIONS		SYNERGY 21		2012. 08. 14	