


NOTE :

1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P
24AWGx2C USB2.0 HIGHSPEED CABLE
2. RoHS compliant.
3. Operating Temperature: -15°C-80°C

BLACK	
ITEM NO.	LENGTH
K5253SW. 0, 5	500 ±5mm
K5253SW. 1, 0	1000 ±10mm
K5253SW. 1, 5	1500 ±15mm
K5253SW. 1, 8	1800 ±18mm
K5253SW. 3, 0	3000 ±30mm
K5253SW. 5, 0	5000 ±50mm

PIN OUT

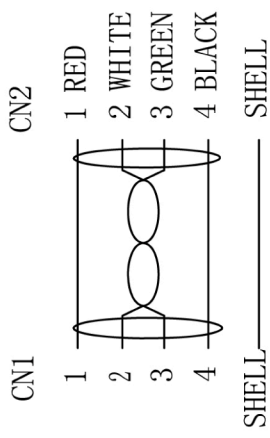

NO.	MAT. NAME	DESCRIPTION	Q' TY
3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE JACKET:PVC/BLACK OD: 4.5±0.2mm	1
2	OVERMOLD	PVC COLOR:BLACK	2
1	CONNECTOR	USB A TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	2 Set