

QUICK MAINTENANCE WITHOUT POWER INTERRUPTION

Easy switching to utility power during UPS maintenance


Designed for Uninterruptible Power Supply (UPS), the Maintenance Bypass PDU (MBP) Series allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The MBPs support flexible installation to meet different space requirement.

SERIES FEATURES

- >1U Rackmount
- LED Status Indicator
- Metal Housing
- Retaining Clip Design
- Rack Ears Included
- Cascading Design

PRODUCT CALLOUTS

- 1 . LED Status Indicator
- 2 . Maintenance Bypass Switch
- 3 . AC Outlet
- 4 . Output Circuit Breaker
- 5 . "To UPS Output" Inlet
- 6 . "To UPS Input" Outlet
- 7 . "Utility Power" Inlet

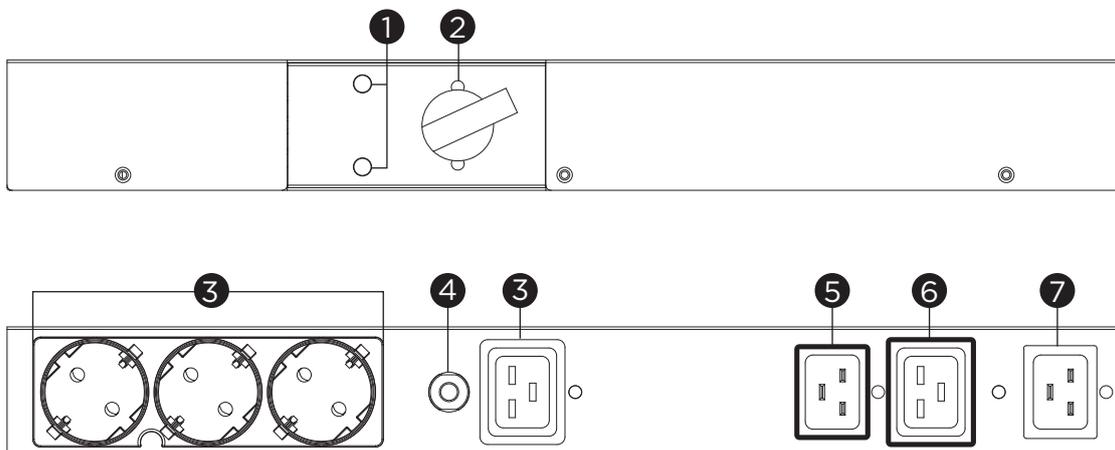

MBP20HVDE3A



TECHNICAL SPECIFICATIONS

| | |
|--|---|
| Model Name | MBP20HVDE3A |
| General | |
| Compatible Models | OL1000ERTXL2U, OL1500ERTXL2U, OL2000ERTXL2U, OL3000ERTXL2U, OL2200ERTXL2U |
| Input | |
| Input Voltage Range (Vac) | 200 - 240 |
| Rated Input Current (A) | 16 |
| Utility Power | IEC C20 |
| UPS Power Input | IEC C19 |
| UPS Outlet | IEC C20 |
| Output | |
| Outlet Type | IEC C19 x 1, Schuko x 3 |
| Typical Transfer Time (ms) | <4 |
| Cascading | Yes, IEC 16A Output Socket |
| Management | |
| LED Indicators | Normal Status (Green Color), Bypass Status (Red Color) |
| Physical | |
| Form Factor | >1U Rackmount |
| Physical Size | |
| Dimensions (WxHxD) (mm.) | 433 x 51 x 76 |
| Weight (kg.) | 1.3 |
| Environmental | |
| Operating Temperature (°C) | 0 - 40 |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90 |
| Certifications | |
| Certifications* | CE |
| RoHS | Yes |

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.

