


REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/29	CHECKED
---------	--------------------------------------	--------------------	---------

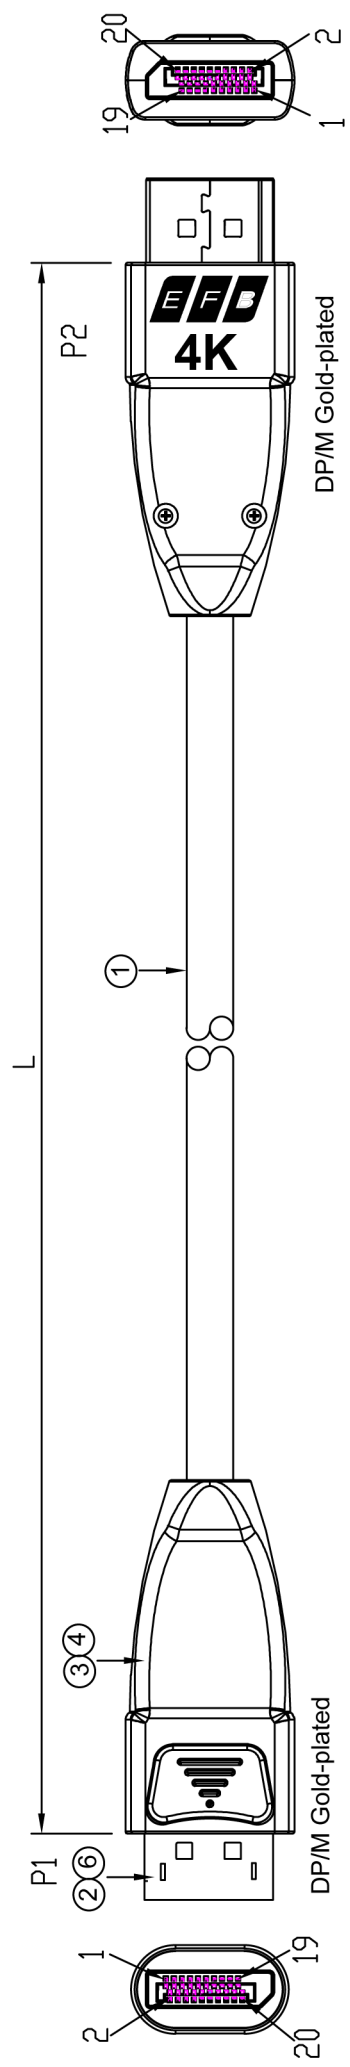



DP/M Gold-plated

DP/M Gold-plated

Remark:
 1. 100% Open/Short Test
 2. Conductive Resistance:5ohms MAX
 3. Insulation Resistance:10M ohm MIN.
 4. HI-POT:DC 300V/10MS.
 5. The product is RoHS compliant.
 6. Dp to Dp 1.2V

- A)Conductor 7/0.107TC
- B)Insulation FPE
- C)Drain wire 7/0.10TC
- D)Al foil
- E)Hot Mylar
- F)Conductor 7/0.10TC
- G)Insulation PE 0.6mm
- H)Al Foil
- I)D.w.
- J)Braiding 16/6/0.12AL
- K)Jacket OD:7.3±0.15mm Black

Cable Spec.

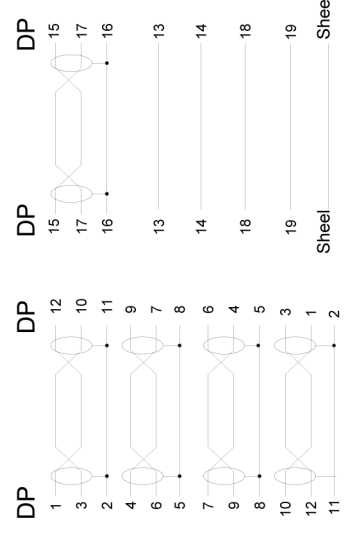

Wire method

Item NO.	Length
K5560HQSW.1	1.0m
K5560HQSW.2	2.0m
K5560HQSW.3	3.0m
K5560HQSW.5	5.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	
④	Shell	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		
	DP 1.2V30AWG [(7/0.10TC+FPE)*1P+7/0.07TC+AL]*5C+ (7/0.10TC+HDPE)*5C+AL+D+96/0.12ALB+ PVCOD7.3mmBlack		

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
	DRAWN

TOLERANCES UNLESS OTHERWISE STATED
 X = ±0.1
 XX = ±0.01