



REVISIONS

REV	DATE	DESCRIPTIONS	APPRO.BY

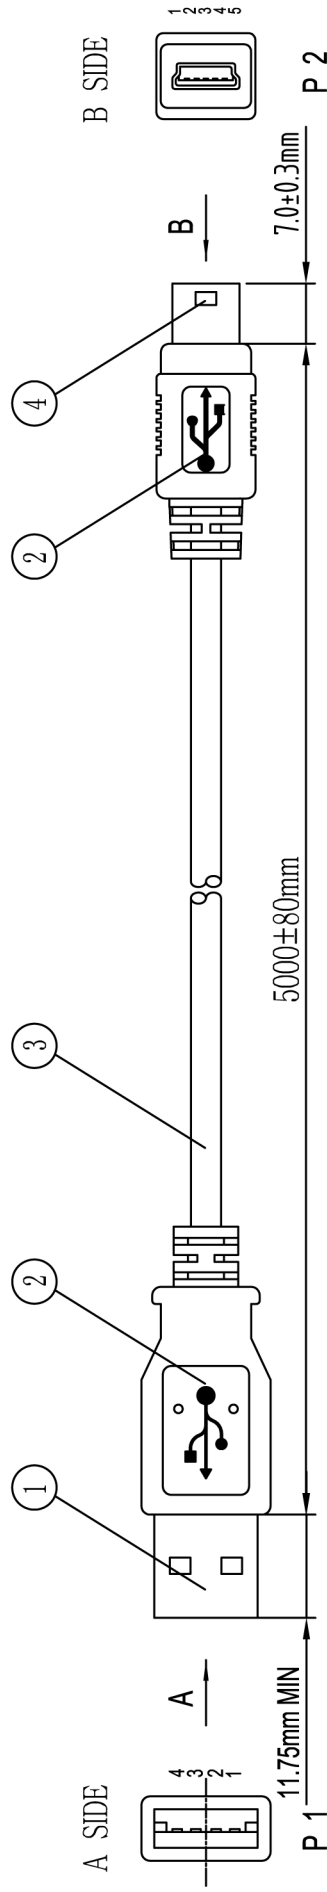

WIRING DIAGRAM

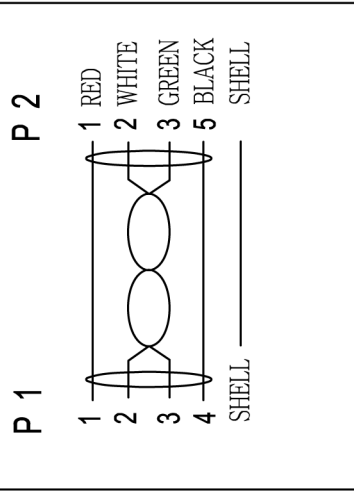

NOTE:

1.PRINTING:

AWM 80°C 30V VW-1 28AWG*1P 24AWG*2C

USB2.0 HIGHSPEED CABLE

2.RoHS COMPLIANT

④	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED 1u" GOLD PLATED PIN, WHITE INSULATOR	SHELL	1 Set
③	CABLE	28AWG TXR*1P+ 24AWG TXR*2C+ AL+ B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.2mm		1Pcs
②	OVERMOLD	PVC COLOR: GREY		2Pcs
①	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN, WHITE INSULATOR		1 Set
NO.	MAT.NANE	DESCRIPTION		Q'TY

CUSTOMER'S ITEM	K5250.5V2	CUSTOMER	EFB
DRAWING		TITLE	USB CABLE
UNIT	mm	SCALE	1:1
DRAWN BY		CHECK BY	APPRO BY
Zhouqinghua			DATE
			2020-09-01

