


- NOTE:
1. RoHS 2.0 and REACH Compliant
 2. 1pc/box + lable 1, 50pcs/ctn+lable 2
 3. With 1pc ceramic sleeve as spare part.


MATERIAL LIST:

⑦	Dust Cap	2.5mm PE Transparent	1	
⑥	Adaptor	2.5mm Male to 1.25mm Female for LC/MU	1	
⑤	Adaptor	stainless steel for 2.5mm SC/ST/FC/LSH	1	
④	Cap	rubber, blue	1	
③	Switch	plastic, orange	1	
②	Housing	metal aluminum, black	1	
①	Battery cover	metal aluminum, black	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
		add spare part (ceramic sleeve)	2020-7-9	A1
		NEW	2020-3-2	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

Labels on product, examples:

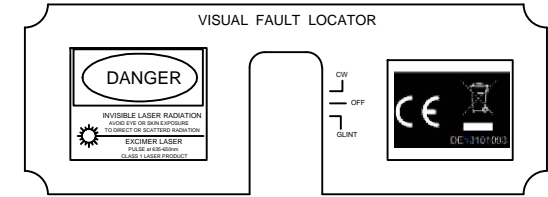

Effect of inner box packaging, for example:

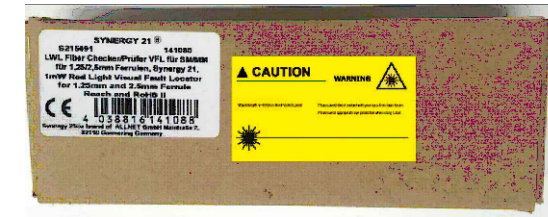

λ	650nm ± 20nm
Power	10mW
Comprehensive Adaptor	2.5mm 、 1.25mm
Detectable range	10km
Operator scheme	pulse 2Hz, CW
Power Supply	2 PCS battery #5
Operation Temperature	-10°C ~ +50°C, <90%RH
Storage Temperature	-20°C ~ +60°C, <90%RH

SYNERGY 21

CUSTOMER		ITEM NO.	S215491V2		
PRODUCT NAME	10mW Red Light Visual Fault Locator for 2.5/1.25	Manufacture Country	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
SYNERGY 21	SYNERGY 21	SYNERGY 21	2020-3-2		