


PIN OUT

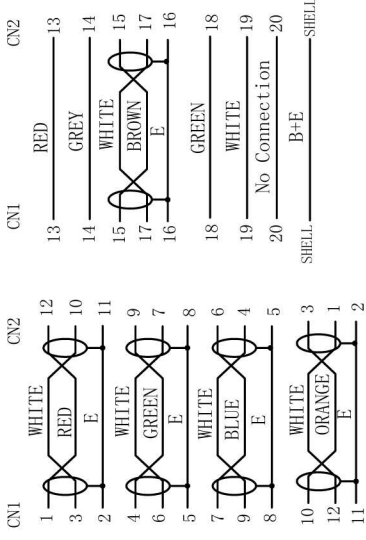

- NOTE:**
- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: DC 200V 10MΩ MIN;
 - Contactor resistance: 5Ω MAX;

- RoHS & Reach Compliant.
- PRINT WORD:** DisplayPort Cable AWM STYLE 20276 80°C 30V VW-1
- Display Port 1.4 Version

MATERIAL LIST:

NO.	PARTS. NAME	SPECIFICATION STANDARD	QTY	REMARK
⑤	PLASTIC HOOD	COLOR/BLACK	2	
④	OUTER MOLD	PVC 88A COLOR:BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	DisplayPort 20P/Male, The pin Gold plated, The shell Nickel plated	2	
①	CABLE	DP 1.4V 28AWG (1/0.32BC*2C+E+AL+HM)*5+1/0.32BC*4C+F+AEB E=1/0.32BC B=0.12mm/8*16 AL-MG JACKER:PVC/BLACK OD:7.3±0.2mm	1	

CUSTOMER'S ITEM	K5567SW.3	CUSTOMER	
DRAWING		TITLE	Display Port DP/M/DP/M
UNIT	mm	SCALE	REV
DRAWN BY		CHECK BY	APPRO BY
Zhouqinghua			DATE
			2019/12/20

