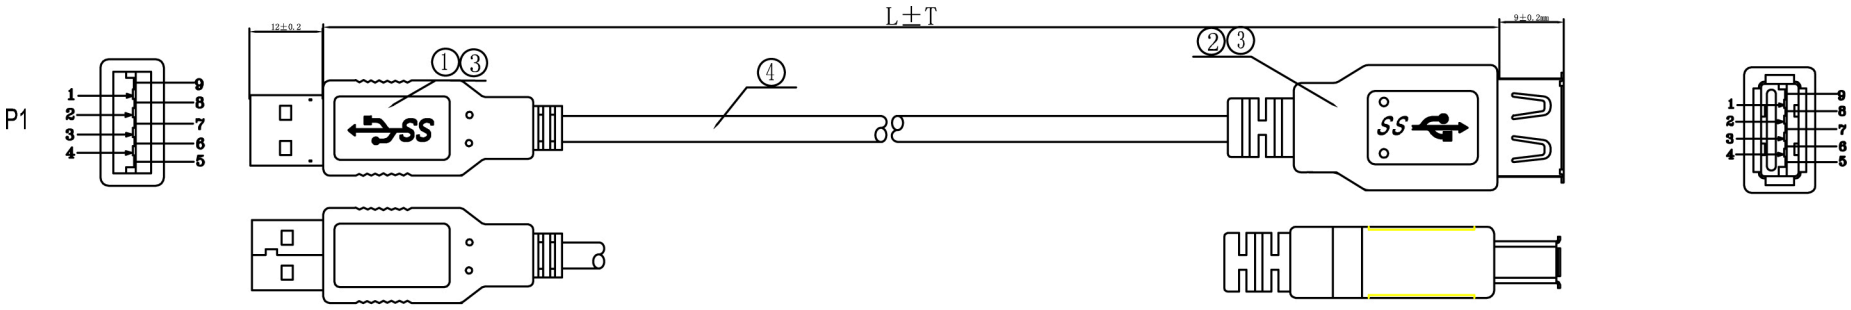

NOTE:

1. PRINTING: AWM 80℃ 30V VW-1 YSB3.0 Super Speed Cable
2. RoHS compliant.
3. Operating Temperature: -15℃-80℃

NO.	MAT. NAME	DESCRIPTION	Q'TY
④	CABLE	USB 3.0 28AWG(7/0.127TC*1P+E+WAM)*2+(7/0.127TC*1P)+(7/0.127TC*2C)+AEB E=0.127TC AL-MG JACKET:PVC/BLACK OD:.5.3±0.2mm	1 Pcs
③	OUTER MOLD	PVC 88A BLACK	2 Pcs
②	CONNECTOR	USB3.0 AF TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE INSULATOR	1 Pcs
①	CONNECTOR	USB3.0 AM TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE INSULATOR	1Pcs

PIN OUT

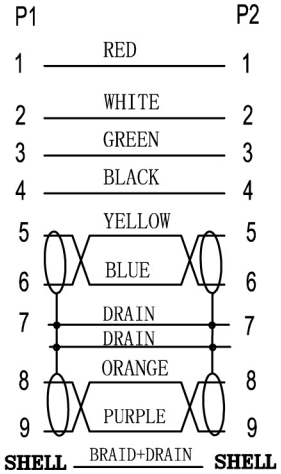

ITEM NO	LENGHT
K5237.1	1000±30mm
K5237.1,8	1800±50mm
K5237.3	3000±70mm
K5237.5	5000±70mm