



REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/29	CHECKED
---------	--------------------------------------	--------------------	---------

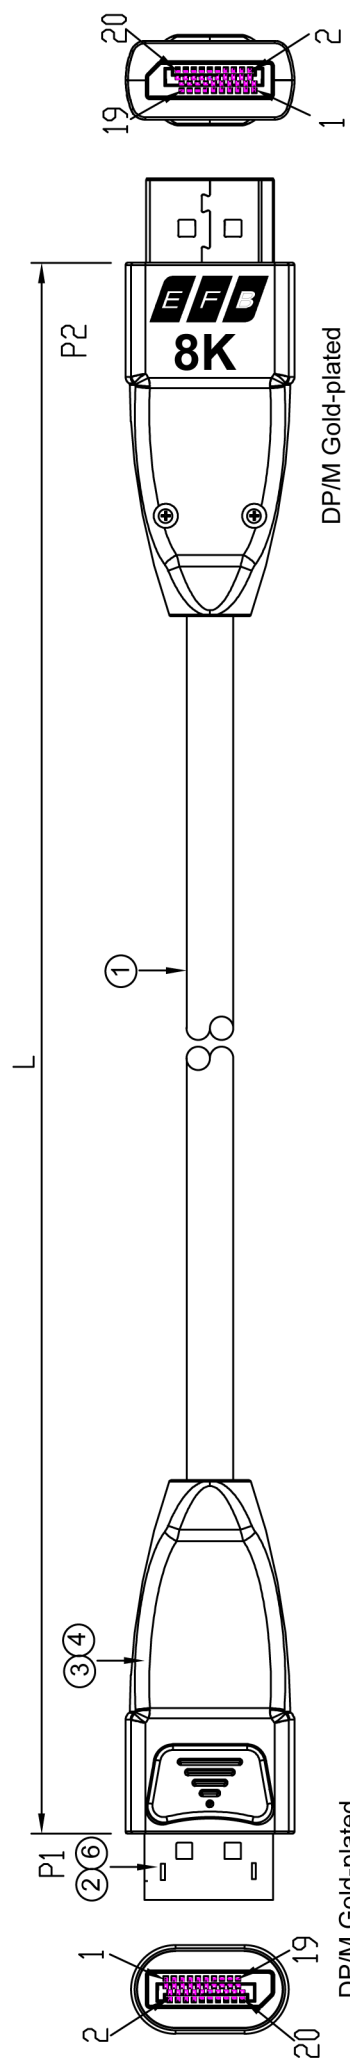


Remark:

- 100% Open/Short Test
- Conductive Resistance: 5ohms MAX
- Insulation Resistance: 10M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is RoHS compliant.
- Dp to Dp 1.4V

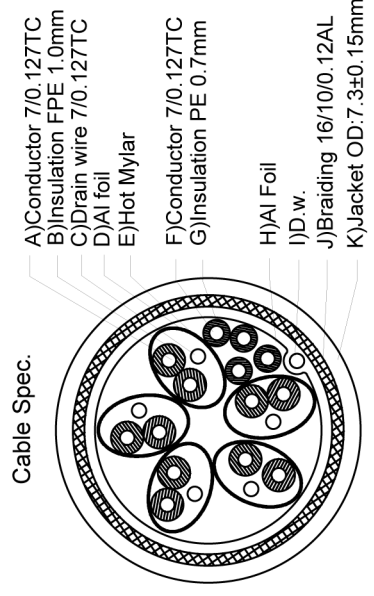

- A) Conductor 7/0.127TC
- B) Insulation FPE 1.0mm
- C) Drain wire 7/0.127TC
- D) Al foil
- E) Hot Mylar
- F) Conductor 7/0.127TC
- G) Insulation PE 0.7mm
- H) Al Foil
- I) D.w.
- J) Braiding 16/10/0.12AL
- K) Jacket OD: 7.3±0.15mm Black

Item NO.	Length
K5567HQSW.5	5.0m

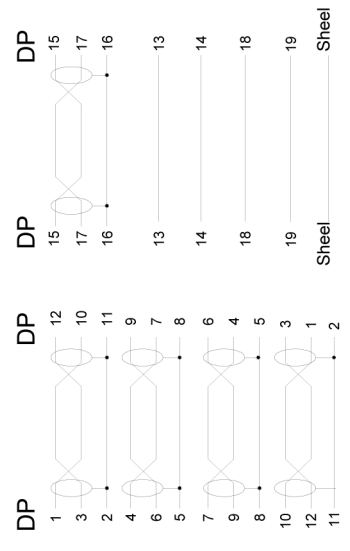

Wire method

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	
④	Shell	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		
	DP 1.4V/28AWG [(7/0.127TC+FPE) *1P+7/0.127TC+AL]*5C+ (7/0.127TC+HDPE)*5C+AL+D+160/0.12ALB+ PVCOD7.3mmBlack		

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
	DRAWN

TOLERANCES UNLESS OTHERWISE STATED  
 X . = ±.1  
 X . = ±.02  
 X . = ±.01