

Specification Sheet

Husky IVO™ 150D

June 18th, 2024

Feature Overview

The Husky IVO™ 150D is a simple, easy-to-use video surveillance appliance for XProtect®. Husky 150D is ideal for smaller sites with installations of only a few cameras and a smaller scale need to view real-time footage locally.

Key Features

- Small form factor – ideal for locations with limited space.
- Up to 16 TB raw video storage.
- 150 Mbps throughput

Easy setup and access

- Reduce the time spent on finding the right installers, downloading drivers and even choosing your XProtect VMS version. The Husky IVO 150D has all this covered for you.
- Seamless setup with the Husky Assistant in a few simple steps
- XProtect software installation binaries pre-loaded, with option of automatically fetching the latest XProtect version online if connected to the Internet
- Windows and XProtect VMS optimizations according to your needs
- Choose any version of XProtect for your setup.

Next level peace of mind

- Your video installation should not only be easy to set up, but also easy to manage and support – without extra costs or complexity. With Husky IVO 150D, you get our standard five-year warranty, with single-point support through Milestone and all the benefits of using XProtect as your VMS.
- Extensive camera compatibility – Compatibility of 14,000+ devices with your XProtect VMS
- Single point of contact for the support of both the VMS and the appliance
- Possibility for onsite support interventions for hardware repairs and replacement.

Recommended Usage

- Up to 20 channels (based on the following video stream: 1080p, 30 FPS, 5-8 Mbps/channel, with video motion detection recording)

Hardware Information

- **Form factor**
 - Desktop small form factor
- **CPU**
 - Intel® Pentium® Gold G7400 3.7GHz 6M Cache (2 Performance Cores, 4 Threads) 46 W
- **GPU**
 - Integrated Intel® UHD Graphics 710 (Intel® Quick Sync Video available)
- **RAM**
 - 16 GB DDR4 (2 x 8 GB)
- **Operating system (OS)**
 - Windows 10 IoT Enterprise 2021 LTSC Value
- **VMS/OS storage**
 - 256 GB (SSD M.2 PCIe NVMe)
- **Number of hard drives**
 - 1 x 3.5" (internal)
- **Raw storage (gross)**
 - 4/8/12/16 TB
(Dell Enterprise Grade 24/7 Drives)
- **RAID controller & support**
 - No
- **Display ports**
 - 3 x DisplayPort™ 1.4
- **Network interface**
 - 1 x 1 GbE (RJ45) + 1 x 2.5 GbE (RJ45)
- **Available PCIe slots and card fit**
 - 1 x PCIe x16 Gen 4, half-height
 - 1 x PCIe x4 Gen 3, half-height (Occupied by 2.5GbE Ethernet Card)
- **Archiving to external NAS**
 - Yes, through LAN
- **Credential and key encryption**
 - Trusted Platform Module (TPM 2.0)
- **Redundant power supply**
 - No

- **Remote management**
 - No
- **USB**
 - 1 x USB 2.0 port with PowerShare (front)
 - 1 x USB 2.0 port (front)
 - 1 x USB 3.2 Gen 2 port (front)
 - 1 x USB 3.2 Gen 2x2 Type-C port (front)
 - 3 x USB 3.2 Gen 1 ports (rear)
 - 3 x USB 3.2 Gen 2 port (rear)
 - 3 x USB 2.0 ports with Smart Power On (rear)

General Information

- **Hardware warranty**
 - 5 years full system warranty (incl. HDD) Onsite support next business day¹
- **Dimensions**
 - 290 x 92.6 x 292.8 (mm) 11.42" x 3.65" x 11.53"
- **Weight**
 - 4.20 kg (min) 9.27 lb (min)
- **Power input**
 - 90 VAC - 264 VAC (47 Hz - 63 Hz)
- **Max. power consumption**
 - Single, 300W up to 92% efficiency (80 Plus Platinum)
- **BTU rating**
 - 1024 BTU/h (max. theoretical)
- **Protection**
 - OVP (over voltage), OCP (over current), OTP (over temp), SCP (short circuit)

Environmental

This unit is intended for stationary server room and office use, according to the conditions stated below.

- **Operating temperature**
 - 5° – 45° C / 41° – 113° F
- **Storage temperature**
 - -40° – 70° C / -40° – 158° F
- **Humidity**
 - 20 – 80% relative humidity (non-condensing)

Regulatory

- Regulatory Model and Type
 - Model D17S, Type D17S001

Miscellaneous


XProtect VMS software

Milestone Husky appliances are preloaded with Milestone XProtect VMS installation binaries, which means that they can be used with any XProtect VMS variants. The required VMS licenses are purchased separately. The units can also be used with XProtect Essential+ with up to 8 cameras for free. Husky IVO 150D2 is compatible with XProtect 2022 R3 releases and newer.

¹ Onsite intervention dispatched following Milestone's support processes – hardware Service Tag information accuracy required. Subject to regional availability, dependent on Dell Technologies support network. Dell Technologies onsite support service will be given on a best effort basis conditioned upon the location of the Husky IVO unit. Onsite support services like NBD or 4HR are being counted from the moment Dell Technologies' troubleshooting is finalized and conditioned upon the hour and the day of the week the troubleshooting finishes.

Milestone reserves the right to correct errors and typos in these data sheets. For the latest version of this document, always check our website * Previous version, CPU Intel® Pentium™ Gold G5400; 8GB DDR4 Ram, 2 x DisplayPort, 1x VGA, 2 x 1 Gbe (RJ45) and changed front and backside.

Previous revisions may still be delivered during transition phases to refreshed revisions.

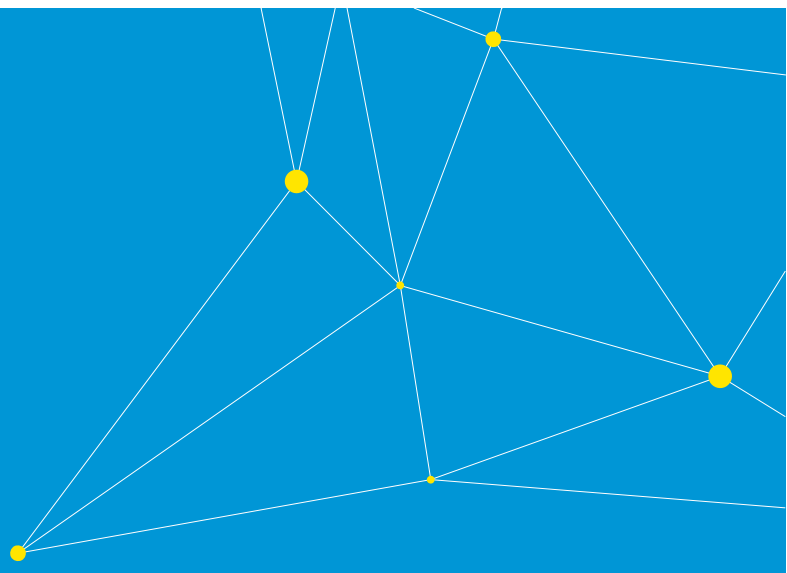

Milestone Systems is a leading provider of open platform video management software; technology that helps the world see how to ensure safety, protect assets and increase business efficiency. Milestone enables an open platform community that drives collaboration and innovation in the development and use of network video technology, with reliable and scalable solutions that are proven in more than 150,000 sites worldwide. Founded in 1998, Milestone is a stand-alone company in the Canon Group.