




REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/29	CHECKED
---------	--------------------------------------	--------------------	---------

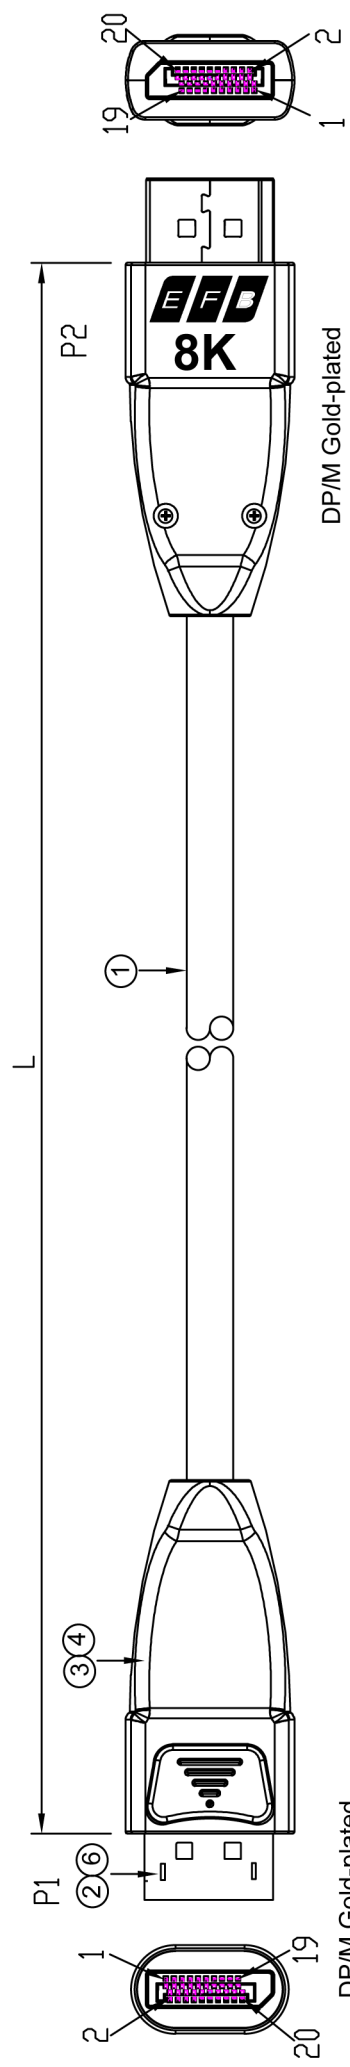

Remark:

- 100% Open/Short Test
- Conductive Resistance: 5ohms MAX
- Insulation Resistance: 10M ohm MIN.
- HI-POT: DC 300V/10MS.
- The product is RoHS compliant.
- Dp to Dp 1.4V

- Cable Spec.
- A) Conductor 7/0.10TC
 - B) Insulation FPE
 - C) Drain wire 7/0.10TC
 - D) Al foil
 - E) Hot Mylar
 - F) Conductor 7/0.10TC
 - G) Insulation PE 0.6mm
 - H) Al Foil
 - I) D.w.
 - J) Braiding 16/10/0.12AL
 - K) Jacket OD: 7.3±0.15mm Black

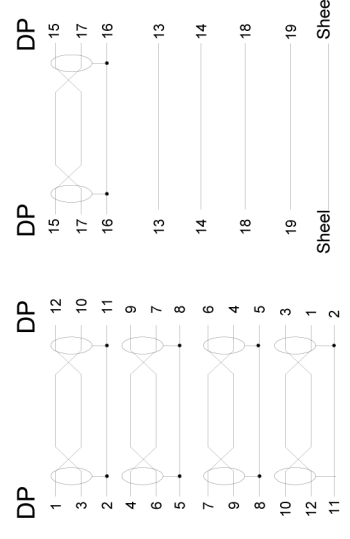

Wire method

Item NO.	Length
K5567HQSW.1	1.0m
K5567HQSW.2	2.0m
K5567HQSW.3	3.0m

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
	DRAWN

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Lid	2PCS	
④	Shell	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		

TOLERANCES UNLESS OTHERWISE STATED
 X = +0.1
 XX = ±0.2
 XX = ±0.1