


P1,P2:	M-Y139C
	M-139C
P3:	M-426E

Customer No: No.6

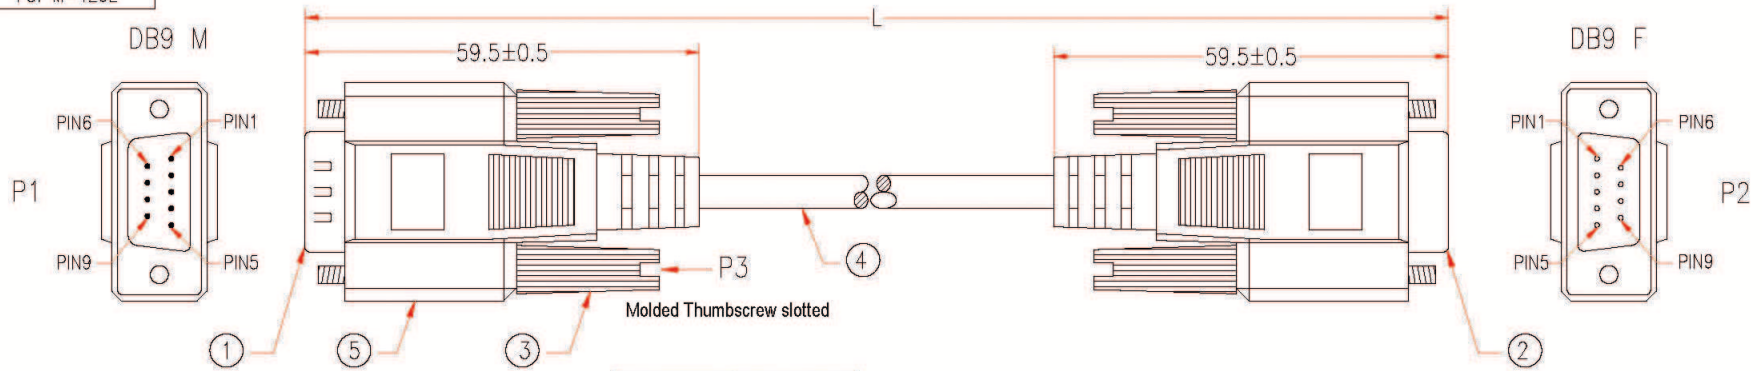

ITEM NO.	Length "L"
EK131.1	1000mm
EK131.2	2000mm
EK131.3	3000mm
EK131.5	5000mm
EK131.10	10000mm

*NOTE: All relevant materials are complied with RoHS directive .
TEMPERATURE: 0 - 70°C

1003-5		
P1		P2
1	brown	1
2	red	2
3	orange	3
4	yellow	4
5	green	5
6	blue	6
7	purple	7
8	grey	8
9	black	9
SHIELD		SHIELD

Note:
Contact Resistance: 10 mOhm
Testing Voltage: 800 V
Rated Voltage: 350 V

No.	DESCRIPTION	Q'TY	Supplier
5	BLACK PVC TUBE ϕ 3.0*22mm	2	M304
	ALUMINUE FOIL 33*65mm	2	M379
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BEIGE		M304
4	NON-UL 9C 30AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL3009C-085	L	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	M108

PART NO. 1006-15		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
APPROVED				
CHECKED				
DRAWING				
DATE	04/SEP/06	ITEM NO.	EK131.X	UNIT:mm