

**NOTES:**

**Performance:**  
Meets Cat.3 EIA/TIA 568A Standard.

**Electrical Specifications:**


Insulation Resistance:500M ohms(min.)  
Contact Resistance:20m ohms (max.)  
Current Rating: 1.5Amps.  
Withstanding Voltage:1000VAC RMS@60Hz/1min.

**Mechanical Specifications:**

IDC Punch Down Cycle: Over 25 Cycles(min.)  
RJ-45 Jack Insertion Cycle: Over 200 Cycles(min.)

**Accessory:**

- 1.Cable Tie (75x2.4mm)x25PCS
  - 2.Instruction Sheet
  - 3.Screw and Nut M6\*17mm x 4set
  - 4.Silica gel 3.5G x 1PCS
- Color: GRAY RAL7035  
PACKING: 1pcs /PE BAG + INNER CARTON

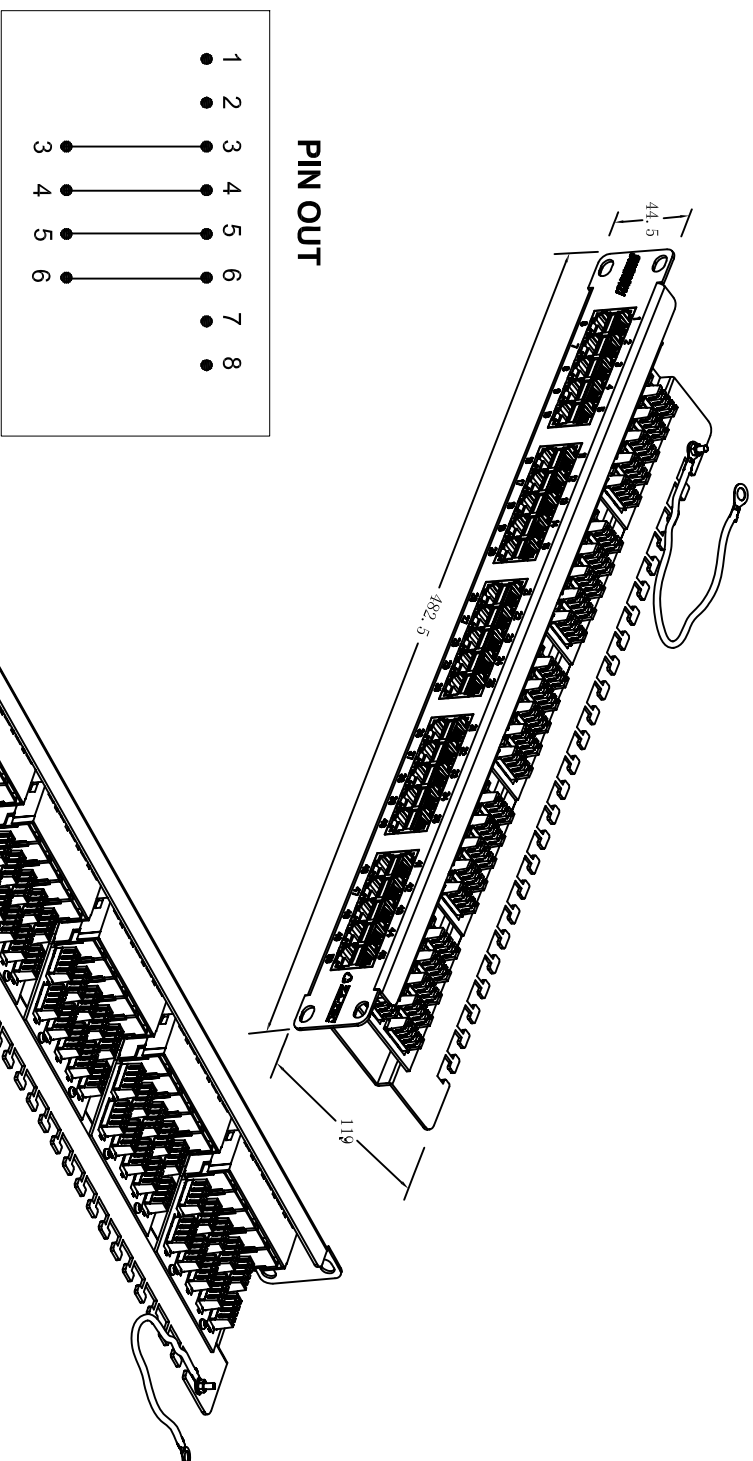


**MATERIAL LIST:**


⑥	Bottom Panel:	1.5mm thickness Metallic Panel (SECC) GRAY RAL 7035	1	
⑤	RJ-45 Jack:	Housing-PBT/UTP RJ 45-Jacks UL-94V0	50	
④	PCB	FR-4/1.6mm UL-94V0	5	
③	IDC Body	Fireproof PC/ABS UL-94V0	50	
②	IDC Pin	Bronze & Tinned	200	
①	IDC Terminal	For 22-26 AWG Cable	200	
	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARK

**SYNERGY 21**

CUSTOMER		ITEM NO.:		S215203	
PRODUCT NAME	CAT.3 PATCH PANEL	manufacturer	CHINA	UNIT	MM
DRAWNBY	SYNERGY 21	CHECKBY	APPOBY	DATE	
DATE	2010-10-27	REV.	A	SYNERGY 21	2010-10-27
REVISION RECORD MODIFICATIONS					
BY	CHK	NEW			

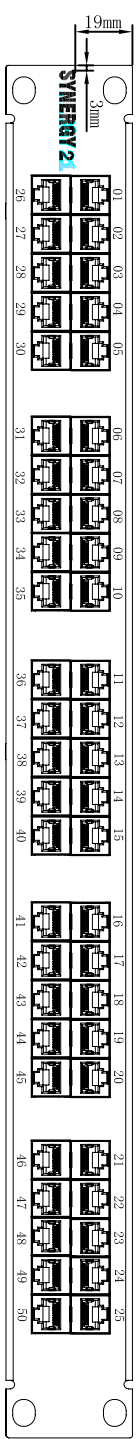

PATCH PANEL COLOR : GRAY

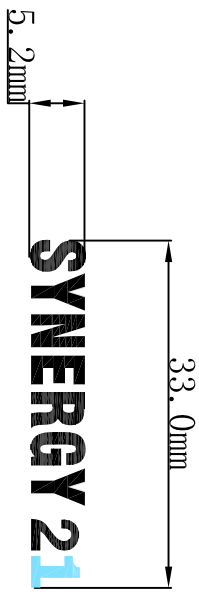

"SYNERGY 2" for black printing The pantone of Color is black c  
 "1" for blue printing The pantone of Color is 298C

**SYNERGY21**

CUSTOMER		ITEM NO.		S215203	
PRODUCT NAME	CAT. 3 PATCH PANEL 50port	manufacture country:	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
NEW		2010-10-27	A		
REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY21	SYNERGY21	SYNERGY21
BY	CHK				2010-10-27