


ZONE REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	14.09.02	

DEGREE CLASS	A	B	C	D
LIMITS				
10 以下	±0.02	±0.05	±0.10	±0.15
10~50 以下	±0.05	±0.10	±0.15	±0.20
50~120 以下	±0.10	±0.15	±0.20	±0.25
120~300 以下	±0.15	±0.20	±0.25	±0.30
300~500 以下	±0.20	±0.25	±0.30	±0.35
500~1000 以下	±0.25	±0.30	±0.35	±0.40
1000~1500 以下	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°

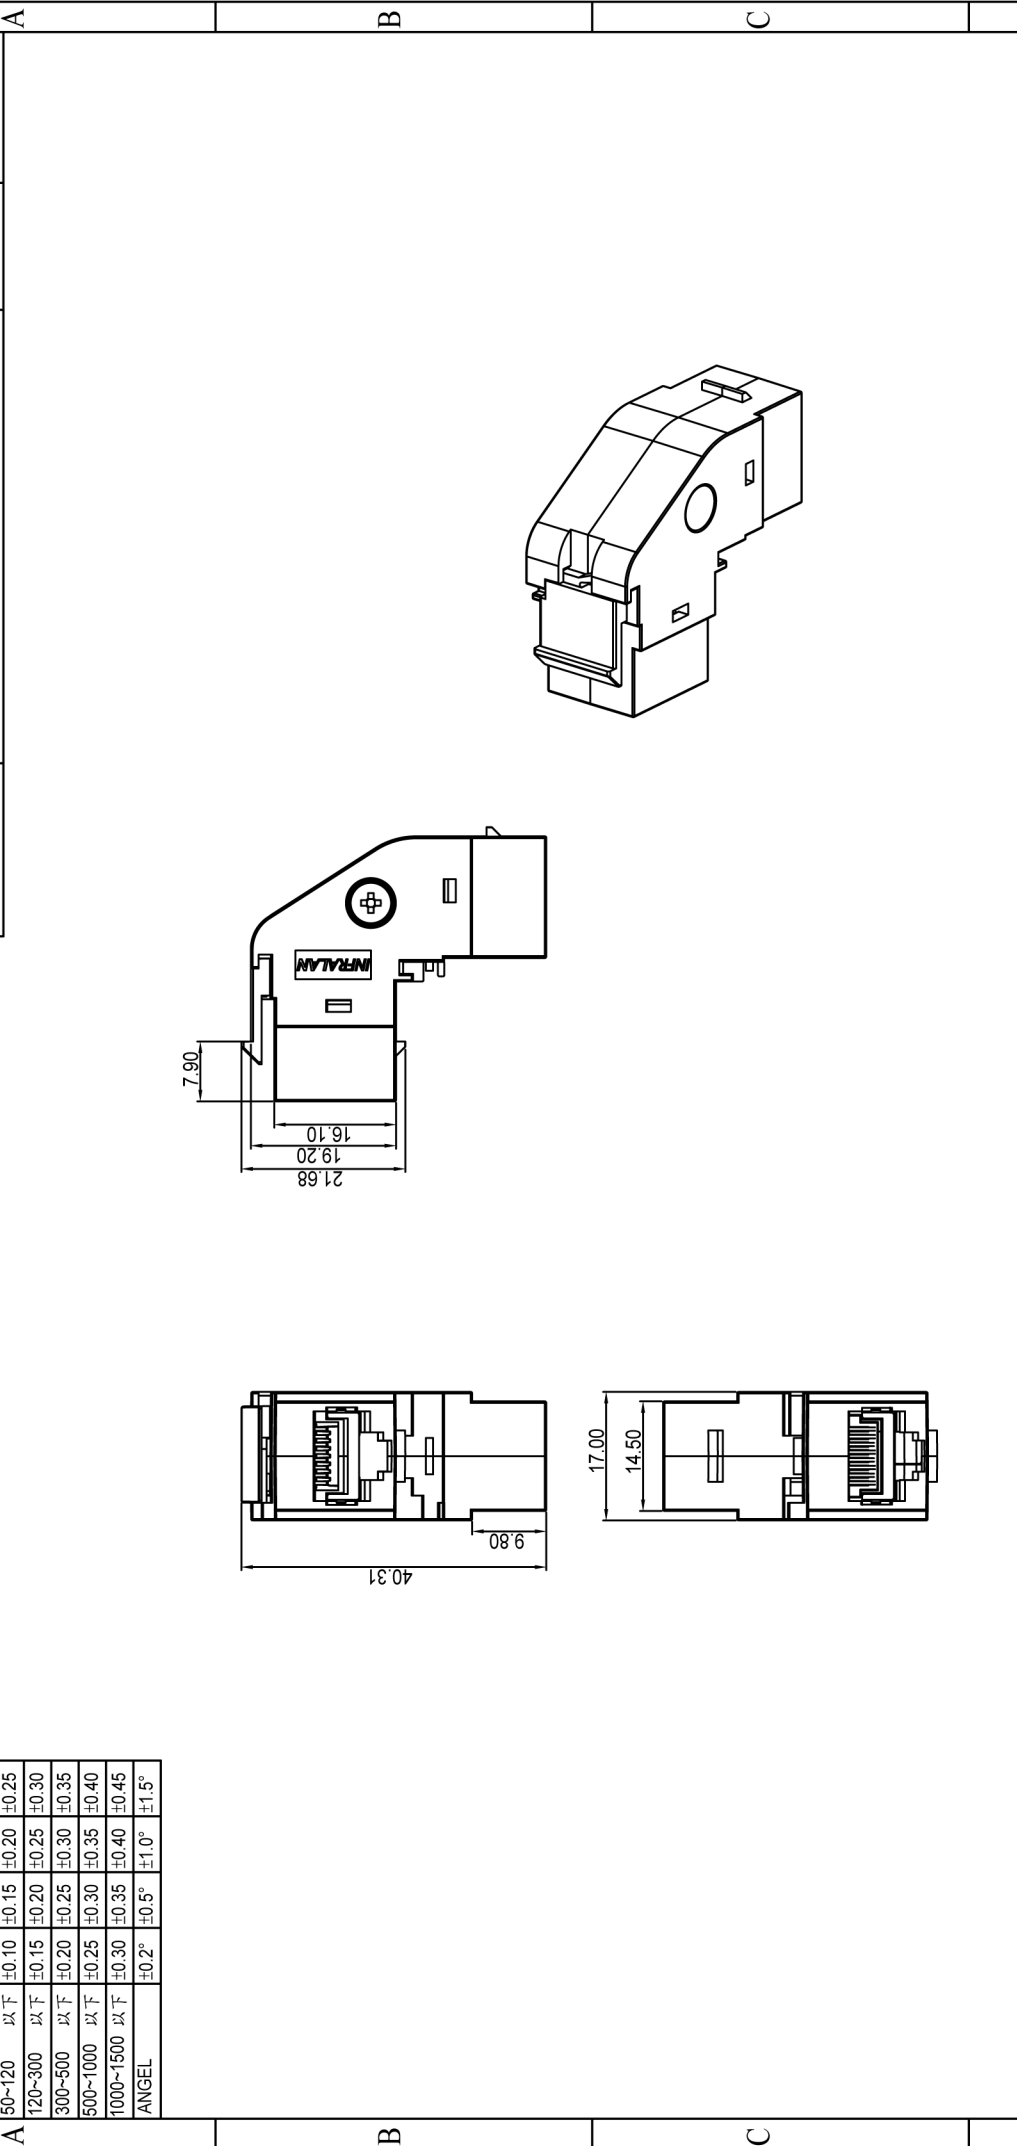

MODEL:	37484.2	TITLE:	90 Degree C6 STP Coupler
DRAWN:		PART NO.	
DESIGNED:		MATERIAL	
CHECKED:		FINISH	
APPROVED:		TOOLING NO.	
		DWG NO.	

UNIT	MM
SCALE	1:1
SHEET	1 OF 1
SIZE	A4
REV.	R1

ELECTRICAL
CURRENT RATING : 1.5A
DIELECTRIC WITHSTANDING VOLTAGE : 1000VDC60HZ
INSULATION RESISTANCE : 500 MΩ MIN.
CONTACT RESISTANCE : 20 mΩ MAX.
MECHANICAL
(1) Plastic Materials: ABS+PC FR
(2) Sheet metal: Phosphor Bronze(electroplating Ni)
(3) R145Jack Contact: Phosphor bronze, 50μr Gold Plating