

There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.


Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.

No guarantee can be given for overheated LED strips.


Attributes

| Attribute | Value |
|-----------------------|-----------------------|
| Abstrahlwinkel: | 120 |
| Ampere: | 4.20 |
| CC oder CV: | CV |
| CRI: | >90 |
| Dimmbar: | abhängig vom Netzteil |
| LED Strip Klebeband: | ja |
| LED Strip Breite: | 10 |
| LED Strip Höhe: | 1.50 |
| LED Strip kürzbar: | 71.40 |
| LED Strip Länge: | 5000 |
| Lichtfabe in Kelvin: | 2700-1800 |
| Lichtfarbe: | warmweiß |
| Lichtfarbe in Kelvin: | 2700-1800 |
| Lichtfarbe Name: | warmweiß |
| Lumen: | 5000 |
| Schutzklasse: | IP20 |
| Volt: | 24 |
| Weight: | 0.5 Kg |
| Warranty: | 60.00 Months |


Additional Images

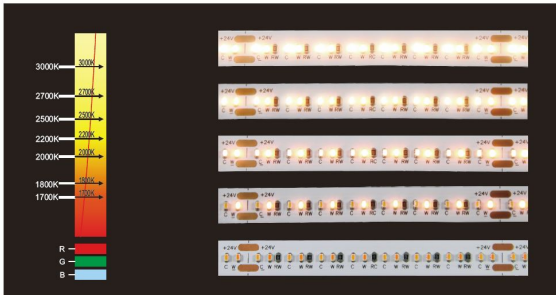


Dimensions

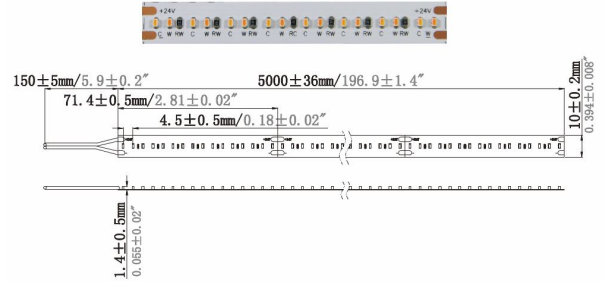


Drawing

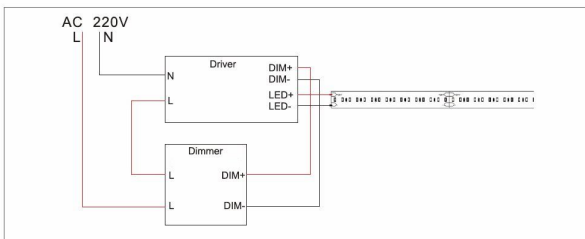

Luminous Intensity Distribution Diagram

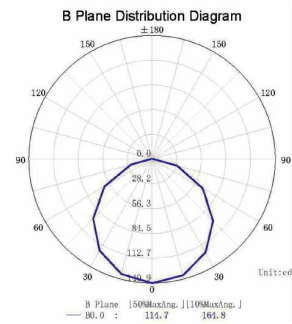

Average Illumination

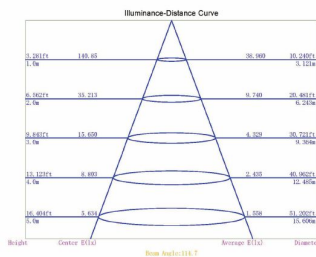



Accessories

| Part No. | Name |
|----------|---|
| 93682 | Mean Well Power Supply - 24V 150W Dimmable IP65 |
| 174020 | Synergy 21 Power supply - 24V 100W BILTON |