


**NOTE:**

- Display port 2.0/1.4 Mode
  - Supports bandwidth up to 32.4Gbps
  - Input: Source port Male TX
  - Output: Display port Male RX
  - Plug and Play
  - Connector the pin and shell gold plating
  - Metal housing with lock
  - Converts electrical data signals to optical signals
  - 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
  - Round cable Black PVC jacket OD. 4.8+/-0.2mm
  - Easy to install with Active Optic Cable
  - Resolution 8K@60Hz (4:4:4) 8bit, 4K@120Hz (4:4:4) 8bit
  - Supports 3D/HDCP2.2/DPCP1.0/EDID/HDR10/DSC1.2/Dolby MAT/DTS HD
  - ROHS 3.0 and REACH compliant
  - Operation temperature : 0°C--+50°C
  - Storage temperature : -20°C--+70°C
- 1pc/ESD Bag+brown box

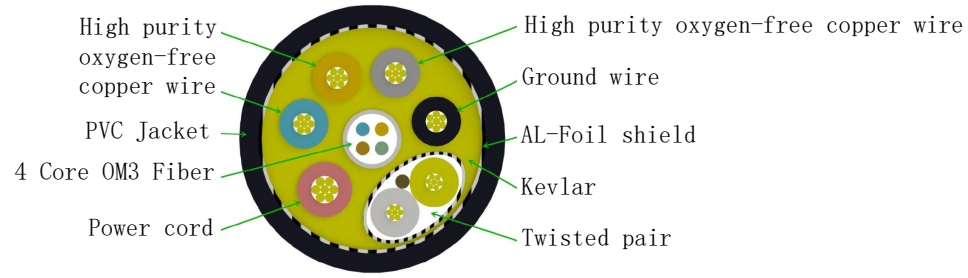

THE CAHRT

ITEM NO.	Length (mm)
S215920	7500
S215921	10000
S215922	15000
S215923	20000
S215924	25000
S215925	30000

**SYNERGY21**

					SYNERGY21			
CUSTOMER					ITEM NO.	SEE THE CAHRT		
PRODUCT NAME	Displayport 2.0/1.4 AOC cable				manufacture country:	CHINA	UNIT	MM
DRAWNBY	NEW		CHECKBY	2022-12-06	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY21	SYNERGY21	SYNERGY21	2022-12-06