

The screenshot shows the ATEN website interface. At the top left is the ATEN logo with the tagline "Simply Better Connections". To the right are navigation links: Home, Partner Center, Contact us, and Site Map. Below these is a "Select Language" dropdown menu and a main navigation bar with links for Corporate, Solutions, Products, News, Support, and Download. A large blue banner with a laptop image features the word "Products" in white. Below the banner is a "Product Browser" section with a search bar and a "Model Search" dropdown set to "VS98A". On the left, a sidebar lists product categories: Enterprise Solutions, SMB Solutions, SOHO Solutions, Embedded Solutions, Accessories, and Video Products (with sub-items like HDMI Splitter, Presentation System, Video Switches, Video Splitters, Video Matrix Switches, DVI Video Switches, DVI Video Splitters, HDTV A/V Switches, and HDMI Switches). The main content area displays the "VS98A" product name, a large image of the device, and smaller images showing the front and back panels. Below the main image is a "Download" section with icons for Manual, Driver, QSG, and Firmware. To the right of the product image are several utility buttons: FAQ, Products Supporting Windows Vista..., KVM Wizard, and Online Test. At the bottom, a section titled "8-Port Video Splitter" includes a description: "The VS98A Video splitter duplicates and boosts the video signal from one input to 8 outputs. It provides greater bandwidth and video resolution as well as extends the transmission distance up to 210' making it excellent for public broadcasting. In addition, units can be".

Video Extenders  
Video Converter

cascaded to accommodate as many monitors as the installation requires.

+ **USB & Firewire** ▾

+ **Data Communication** ▾

+ **KVM Cables** ▾



**Patent NO. :** TW 152473 (Taiwan) ,US 6,119,148 (USA) ,CN ZL 98218061.6 (China) ,DE 29814640.1 (German)


## | **Features** ▾

- One video input to 8 video outputs.
- Cascadable to 3 levels -provides up to 512 and thousands of video Signals.
- Supports up to 200 MHz bandwidth.
- Long distance transmission - up to 65m (210').
- High video resolution - 1920 x 1440.
- DDC, DDC2, DDC2B Compatible (Port 1 only).
- All metal casing.
- Supports VGA, XGA, SVGA, UXGA and multisync monitors.
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun

## | **Package Content** ▾

- 1x 8-Port Video Splitter
- 1x Power Adapter
- 1x User Manual

## | **Diagram** ▾

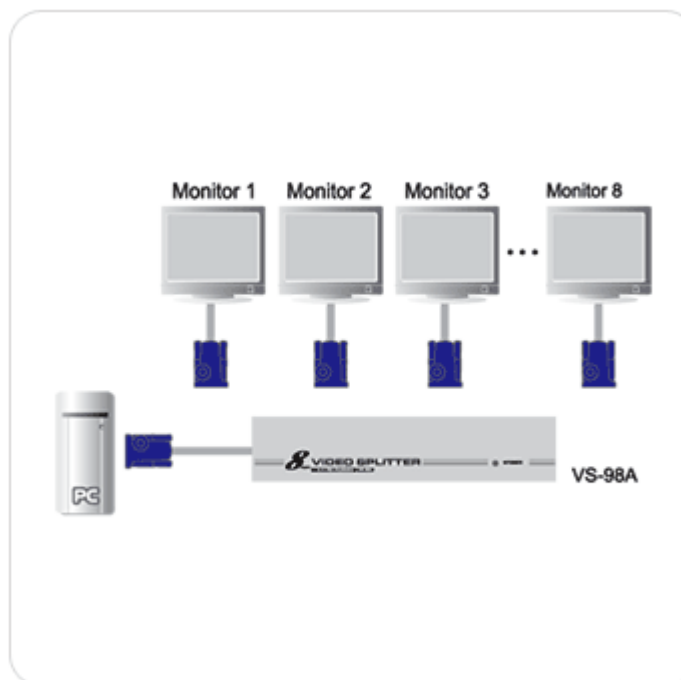

+ [View enlargement](#)

## Specification



<b>Display Connections</b>		8
<b>Connectors</b>	Video In	1 x HDB-15 Male (Blue)
	Video Out	8 x HDB-15 Female (Blue)
	Power	1 x DC Jack (Black)
<b>LEDs</b>	Power	1
<b>Video Bandwidth</b>		200 MHz
<b>Video</b>		1600 x 1200 @ 60Hz
<b>Signal Range</b>		Up to 65m (210')
<b>Power Consumption</b>		DC9V, 3.6W (Max.)

<b>Environment</b>	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
<b>Physical Properties</b>	Housing	Metal
	Weight	0.53 kg
	Dimensions (L x W x H)	20.00 x 7.50 x 4.50 cm

- \* The specification and pictures are subject to change without notice.
- \* All trademarks and logos are the properties of their respective holders.

 [Top](#)

ATEN.com is published by ATEN International Co. Ltd., Taiwan. All rights reserved.