

MATERIAL LIST:

⑭	SC Transparent Dust cap	2	
⑬	SC/ UPC MM Ferrule ϕ 126-128um	2	
⑫	SC 3.0 MM Beige Duplex Connector	2	
⑪	SC Beige Clip	1	
⑩	SC Red Boot	1	
⑨	SC Black Boot	1	
⑧	Black Heat shrink tubing	2	
⑦	Fiber Optical MM OM2 50/125um OD: ϕ 3.0 Orange LSZH	1	
⑥	Ring (1.2)	4	
⑤	ST 3.0 Red boot	1	
④	ST 3.0 Black boot	1	
③	ST MM Connector	2	
②	ST /UPC MM Ferrule ϕ 126-128um	2	
①	ST Transparent Dust cap	2	
NO	DESCRIPTION	QT'Y	REMARK

Note:

1. Grade Designation: Each to Reference
2. ROHS 3.0 AND REACH Compliant
3. Faser : BIMMF, minimum bending radius 7.5mm


TYPE	MULTI-MODE
Insertion LOSS	≤ 0.3 dB
Return LOSS	≥ 30 dB
Test Wavelength	850nm

		add the Faser and minimum bending radius	2022-2-17	A3	SYNERGY 21					
		UPDATE COMPLIANT	2013-06-24	A2	CUSTOMER		ITEM NO.	see the chart		
		Fiber cable OD 2.0 to 3.0mm	2012-08-13	A1	PRODUCT NAME	ST/SC 50/125 OM2 PATCH CORD	manufacture country	CHINA	UNIT	MM
		NEW	2011-01-21	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV	SYNERGY 21	SYNERGY 21	SYNERGY 21	2011-01-21		

chart:

NO.	ITEM NO.	LENGTH.	color	EAN Nummer	PACKING
1	S216249	0.5M	Orange	4038816224330	SYNERGY 21 BAG A
2	S216252	1M	Orange	4038816224361	SYNERGY 21 BAG A
3	S216255	2M	Orange	4038816224392	SYNERGY 21 BAG B
4	S216258	3M	Orange	4038816224422	SYNERGY 21 BAG B

PACKING DRAW

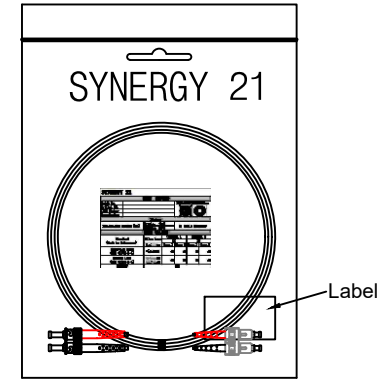

PACKING: SYNERGY 21 PE BAG+LABEL

		add the Faser and minimum bending radius	2022-2-17	A3	SYNERGY 21					
		UPDATE COMPLIANT	2013-06-24	A2	CUSTOMER		ITEM NO.	see the chart		
		Fiber cable OD 2.0 to 3.0mm	2012-08-13	A1	PRODUCT NAME	ST/SC 50/125 OM2 PATCH CORD	manufacture country	CHINA	UNIT	MM
		NEW	2011-01-21	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV	SYNERGY 21	SYNERGY 21	SYNERGY 21	2011-01-21		