

Synergy 21 LED light panel R600 neutral white round



kwh/1000h:	66,00
Lumens:	5000
Watt:	60,0
Nominal Service Life:	50000 Std.
Switching Cycles:	100000
Opt. Ambient Temperature.:	25 °C



Round Ultra Slim LED Panel Light
Suitable for ceiling suspension

Frame colour: white
Power consumption: 60Watt
Number of lumens: 5000lm
Light colour: neutral white 4100k \pm 100
Colour rendering: CRI: >83
Protection class: IP40
Impact resistance: IK05
Operating temperature: -20° to +60°
Power supply: Power supply unit (e.g. #115375), dimmable power supply unit (#113856) & pendant kit (#115374) not included!
Power consumption: 1400mA, 38V/DC
Size: 580mm x 15mm
Weight: 3150g

Suitable power supplies: 1400mA, 38VDC
Meanwell: 113855, 113856 (dimmable), 104642 (dalidimm), 114125 (triac dimm)



Energy efficiency class: A+
kWh/1000h: 66

Connection: striped wire is the positive pole

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	1.40
CC oder CV:	CC
CRI:	>83
Dimmbar:	Ja, abhängig vom Netzteil
Grösse:	380x13,5
LED - Gehäusefarbe:	weiß
LED - Gehäusematerial:	Aluminum
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4100
Lumen:	5000
Schutzklasse:	IP40
Volt:	38
Weight:	3.15 Kg
Warranty:	36.00 Months

Additional Images

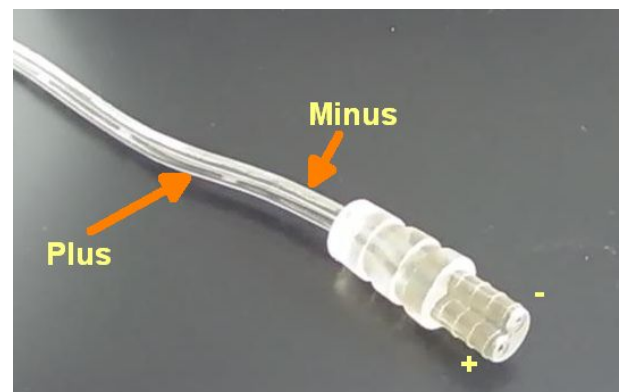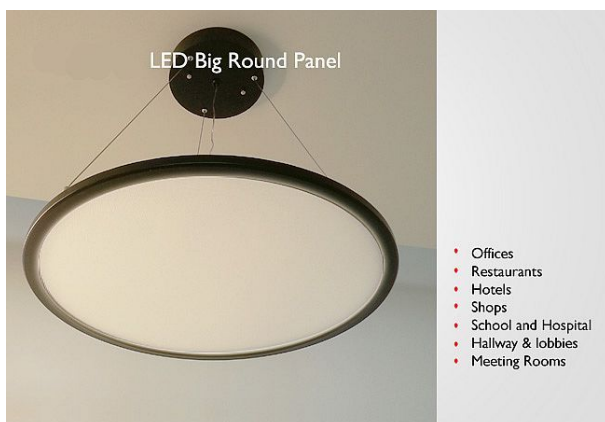

Accessories

Part No.	Name
115374	Synergy 21 LED light panel R600/R1000 with pendant kit
113856	Mean Well power supply - CC Driver 1400mA ~42V 0-10V dimm IP67
134899	Synergy 21 Netzteil - Einschaltstrombegrenzer OSRAM
131690	Synergy 21 LED light panel 300*1200 Up& Down or Pontos transparent cable for power supply unit