

Note:

1. The length L is customized
2. Polarity: Crossover A-B, B-A.
3. RoHS 2.0 And Reach Compliant

MATERIAL LIST:

⑦	LC Uniboot Boot White	2pcs	
⑥	Pull rod Aqua	2pcs	
⑤	LC Uniboot Clip Aqua	4pcs	
④	LC Uniboot Connector Aqua	4pcs	
③	LC/UPC Ferrule	2pcs	
②	LC Dust Cap White	4pcs	
①	Fiber Optical Cable Duplex ϕ 2.0 MM OM3 LSZH (one tube with 2 fiber) Aqua color	L	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK

TYPE	MULTI-MODE
Insertion LOSS	≤ 0.3 dB
Return LOSS	N/A
Test Wavelength	850nm

SYNERGY 21									
CUSTOMER			ITEM NO.			See The Chart			
PRODUCT NAME			Manufacture country			CHINA	UNIT	MM	
DRAWNBY			CHECKBY			APPOBY		DATE	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	2018-10-26		

		NEW	2018-10-26	A
--	--	-----	------------	---

SYNERGY 21


LC Uniboot Connector Switch Polarity Manual

— How to guide


1 Get ready to switch




2 Open buckle

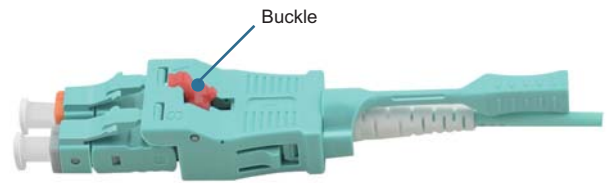

3 Shell separated

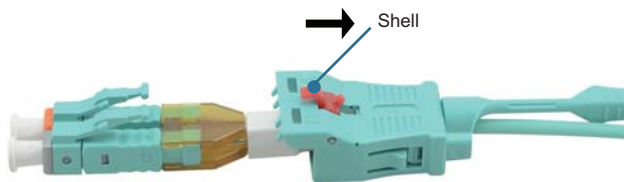

4 Rotate the spare parts A & B

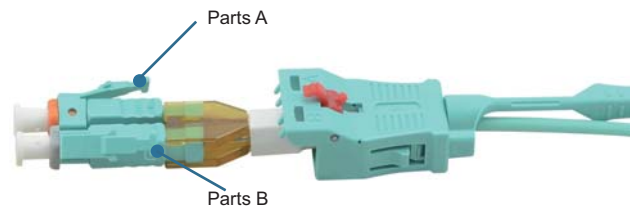

5 Spare parts rotate 180°



6 Shell rotate 180°



7 Push back shell



8 Assemble push-pull knob

